



TYPICAL

GC0303-D2

UPPER AND LOWER FEED LOCKSTITCH SEWING
MACHINE WITH THREAD TRIMMER

OPERATION INSTRUCTION / PARTS MANUAL

- ☐ Please don't adjust and repair the machine by non-professionals, except adjusting stitch.
- ☐ Specifications subject to change without notice

TYPICAL SEWING MACHINE WANPING MACHINERY CO., LTD.

ADD: WANPING TOWN, WUJIANG CITY, JIANGSU
PROVINCE, CHINA
TEL: +86-512-63391278
FAX: +86-512-63391371
POST. CODE: 215223
[Http://www.typicalwpchina.com](http://www.typicalwpchina.com)
E-mail: export@typicalwpchina.com

CONTENT

Operation Instruction

1.Brief introduction.....	
2.Machine specification.....	
3.Installing the motor.....	
4.Installing the oil pan.....	
5.Installing the machine head.....	
6.Installing the knee lifter assy.....	
7.Adjusting the knee lifter.....	
8.Installing the belt.....	
9.Installing the bobbin winder.....	
10.Installing the belt cover.....	
11.Lubrication.....	
12.Checking the machine pulley rotating direction.....	
13.Test operation.....	
14.Installing the needle.....	
15.Removing the bobbin case.....	
16.Winding the bobbin thread.....	
17.Threading the bobbin thread.....	
18.Threading the needle thread.....	
19.Adjusting the stitch length.....	
20.Sewing and backtacking.....	
21.Adjusting the thread tension.....	
22.Adjusting the presser foot pressure.....	
23.Adjusting the trailing length after thread trimming.....	
24.Adjusting the thread tension spring.....	
25.Adjusting the upper thread guide.....	
26.Adjusting the presser foot height.....	
27.Adjusting the feed dog height.....	
28.Adjusting the feed dog angle.....	
29.Adjusting the difference of stitch length between the forward	
30.Adjusting the tension release.....	
31.Adjusting the timing of needle and feed mechanism.....	
32.Adjusting the rotary hook lubrication amount.....	
33.Adjusting the height of needle bar and the timing with hook	
34.Adjusting the oil pump.....	
35.Adjusting the lifting amount of presser feet.....	
36.Adjusting the synchronizer.....	
37.Adjusting the trimming mechanism.....	
38.Clean.....	

Parts Manual

1.Casting mechanism.....	
2.Needle bar and thread take-up mechanism.....	
3.Presser foot mechanism.....	
4.Feed mechanism.....	
5.Upper feed mechanism.....	
6.Hook mechanism.....	
7.Lubrication mechanism.....	
8.Thread trimming mechanism.....	
9.Reverse stitching mechanism.....	
10.Accessories.....	

Operation Instruction

1. Brief introduction

This machine is designed with link type feed mechanism and link lever thread take-up mechanism and full lubrication by pump. It's suitable for sewing leather, canvas and other heavy weight materials, such as suitcase, car seat, tent, sofa, etc. It's reliable and accurate on such functions as thread trimming, needle positioning, etc.

2. Main specifications



Applications	Medium & heavy weight materials
Max sewing speed	2000 s.p.m
Max stitch length	8mm
Needle bar stroke	37mm
Lifting amount of presser foot	3.5-5.5mm
Needle	DPX17 23# By hand
Presser foot	By hand
Presser foot lifting height	16mm
Lubrication	Large lubrication hook
Motor power	Automatic lubrication
	Servo motor

3. Installing the motor (Fig.1)


Move the motor (C) leftward or rightward, to make the machine pulley groove (A) and motor pulley groove (B) on one line.

4. Installing the oil pan (Fig.2)

- 1.Insert the two head cushion ② into the front corners of the oil pan ①;
- 2.Insert the two head cushion ③ into the back corners of the oil pan ①;
- 3.Place the oil pan ④ into the cutouts of table;
- 4.Insert the two rubber cushion ⑤ into the notches of table.

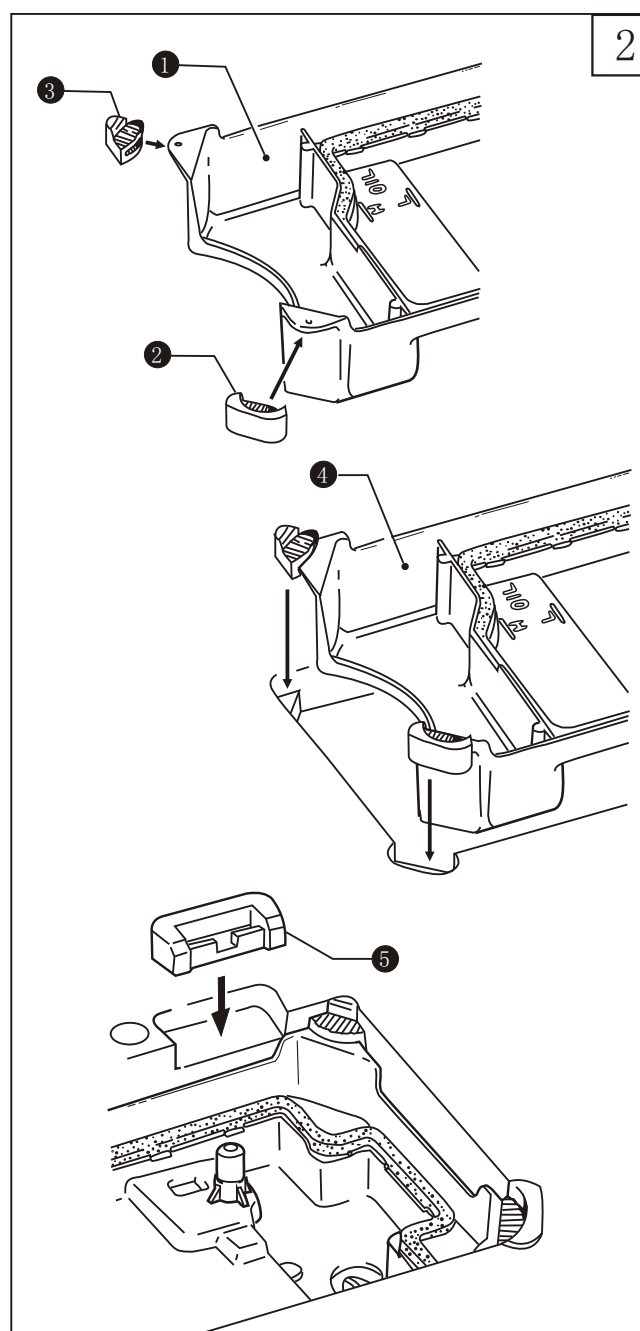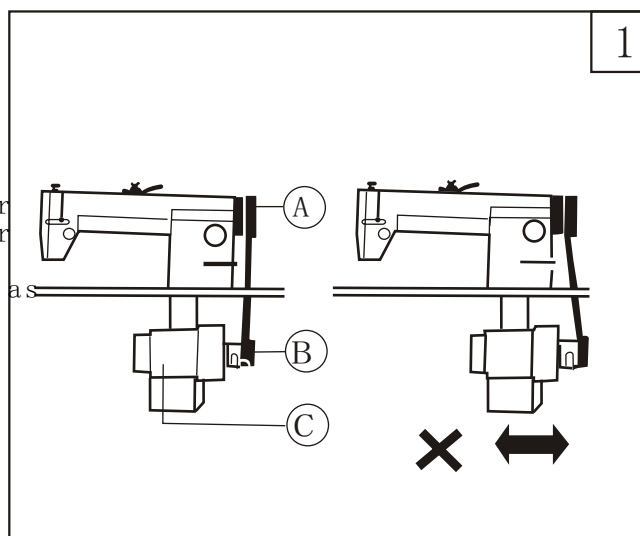

3

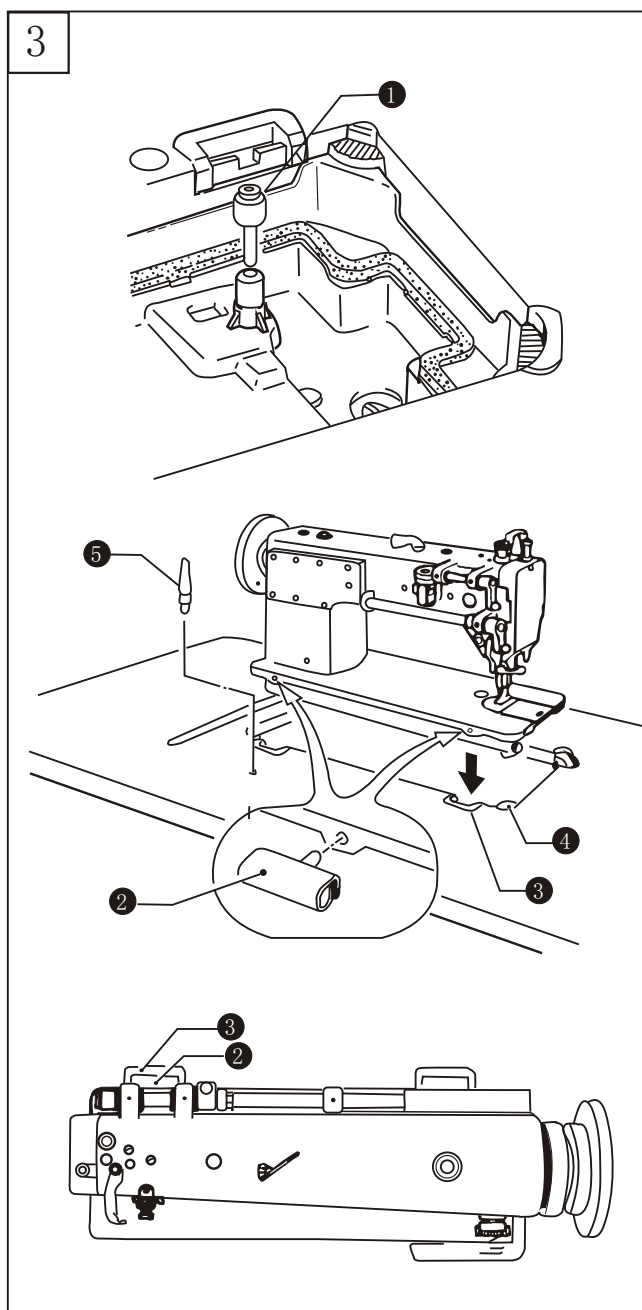

5. Installing the machine head (Fig. 3)

1.Insert the knee lifter lifting bar ①.


2.Insert the two hinges ② into the holes in the machine bed.

3.Clamp the two hinges onto the rubber cushions ③ in the work table, and the place the machine head onto the head cushions ④ which are on the top of the oil pan corners.

4.Tap the rest bar ⑤ into the table hole.

NOTE: Tap the rest bar securely into the table hole, if not, the machine head will not be safe when it is tilted back.

4

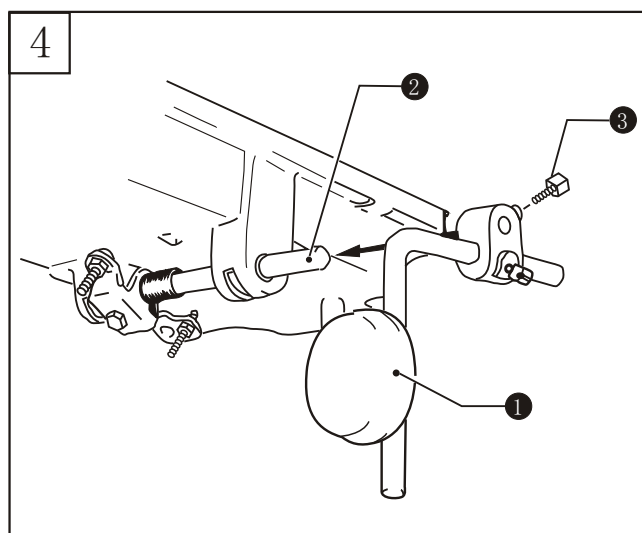


6. Installing the knee lifter assy. (Fig. 4)

Insert the knee lifter assy. ① into the shaft ② under the oil pan, and slightly tight the screw ③.


7. Adjusting knee lifter (Fig. 5)

1. Lower the presser foot ② by turning the presser foot bar lifter ①.
2. Loosen the nut ③.
3. Turn the screw ⑥ to adjust the bracket ⑤ to 2mm play.
4. Securely tighten the nut ③.
5. Loosen the nut ⑦.
6. Turn the screw ⑧ until the distance between the end of the screw and bracket is approximately 8mm.
7. Turn the adjusting screw ⑧ to adjust, so that the presser foot is at the desired position within a distance of 16mm above the needle plate when the knee lifter plate ④ is fully pressed.
8. After adjustment, tighten the nut ⑦.

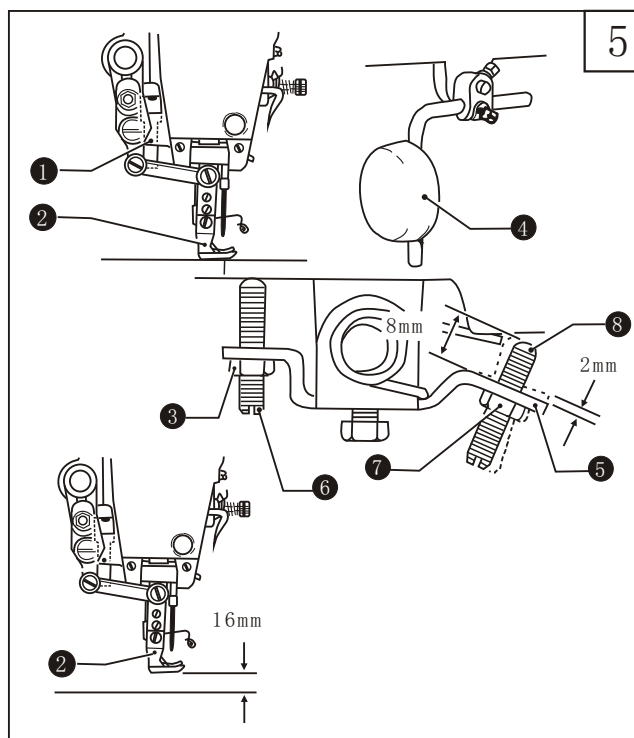


8. Installing the belt (Fig. 6)

1. Tilt back the machine head, and then place the belt ① onto the machine pulley and motor pulley.
2. Turn the nut ② to adjust, so that there is 10-14mm of deflection of the belt when it's pressed at the middle point by a force of 5N.

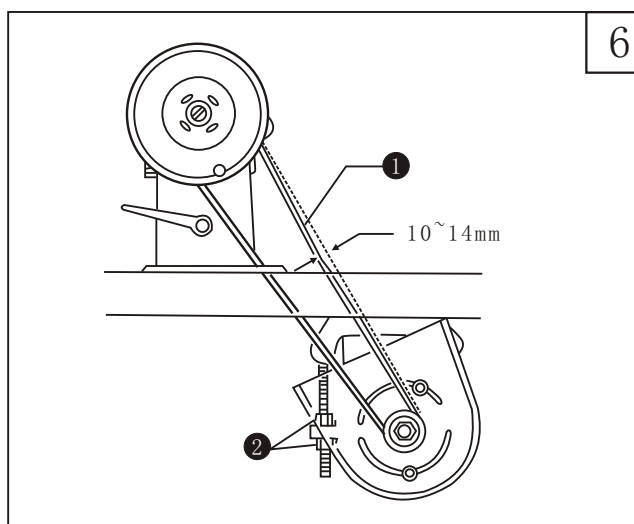


9. Installing the bobbin winder (Fig. 7)

1. Push down the bobbin presser arm ① as far as it will go.
2. Press the bobbin winder wheel ② on the belt, and push the belt by approximately 5mm, meanwhile make sure that the winder should be parallel with the belt hole in the work table.
3. Fix the winder by two screws ④.
4. Pull the bobbin presser arm ① back, and check that there is the clearance of approximately 8mm between the bobbin winder wheel ② and the belt ③.

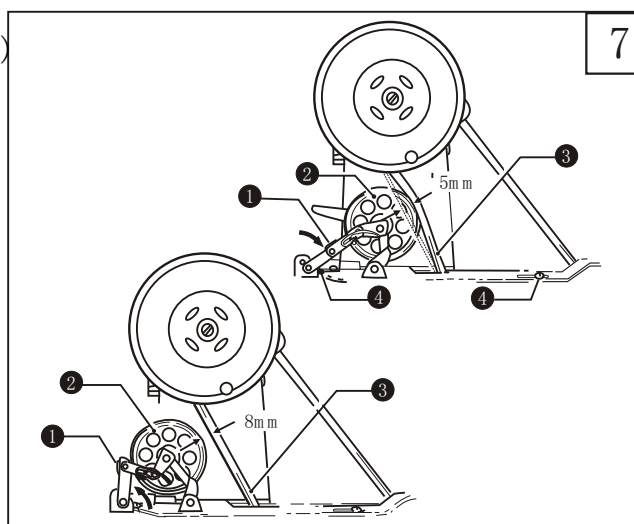


8

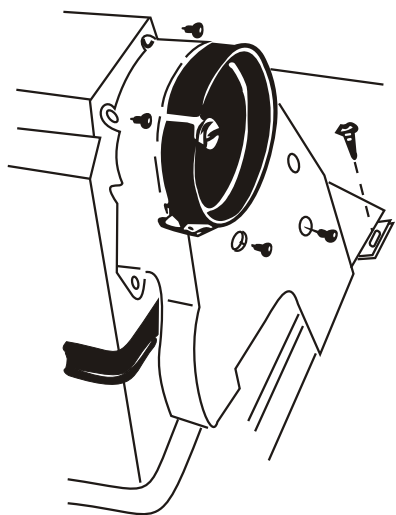

10. Installing the belt cover (Fig. 8)

Please install the belt cover as shown in the Fig. 8

9

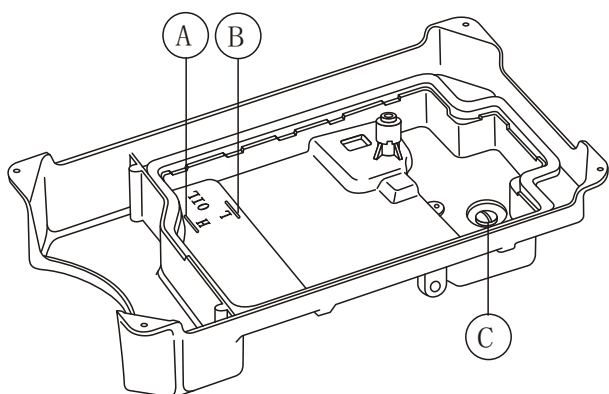

11. Lubrication (Fig. 9)

1.Oil amount

Please fill the oil according to the mark indicated on the oil pan. Mark (A) means the highest position. Mark (B) means the lowest position. If the oil amount is lower than the Mark (B), oil will not be pumped and machine will be jammed.

2.Fill the oil


Please fill the 18# sewing oil into the oil pan up to the Mark (A)

3.Change the oil

1.Uninstall the screw (C), and drain out the used oil

2.Clean the oil pan, and tighten the screw (C), fill the fresh oil again according to the requirement.

10

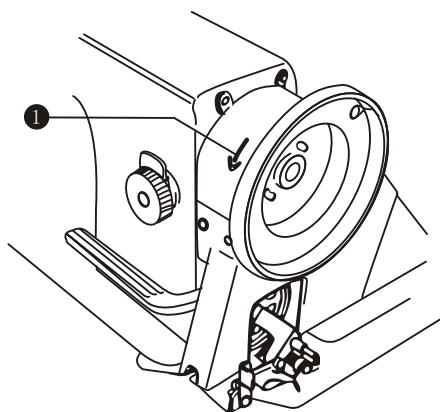

12. Checking the machine pulley rotating direction (Fig. 10)

1.Insert the power plug and turn on the switch.

2.Depress the treadle slightly and check if the machine pulley starts to turn in the direction of the arrow.

3.If not, change the direction according to the operation instruction of motor.


13. Test operation (Fig. 11)


Carry out the test operation when start up a new sewing machine for the first time, or restart after a long period of non-use.

Remove the rubber cap (A) on the top of the arm and face plate, fully lubricate the parts showed by the arrows.

Install the face plate again, lift the presser foot and operate the machine at a lower speed of 1000-1500spm, and observe the oil running through the oil gauge window.


After one month, then the speed can be increased according to the different sewing operation.

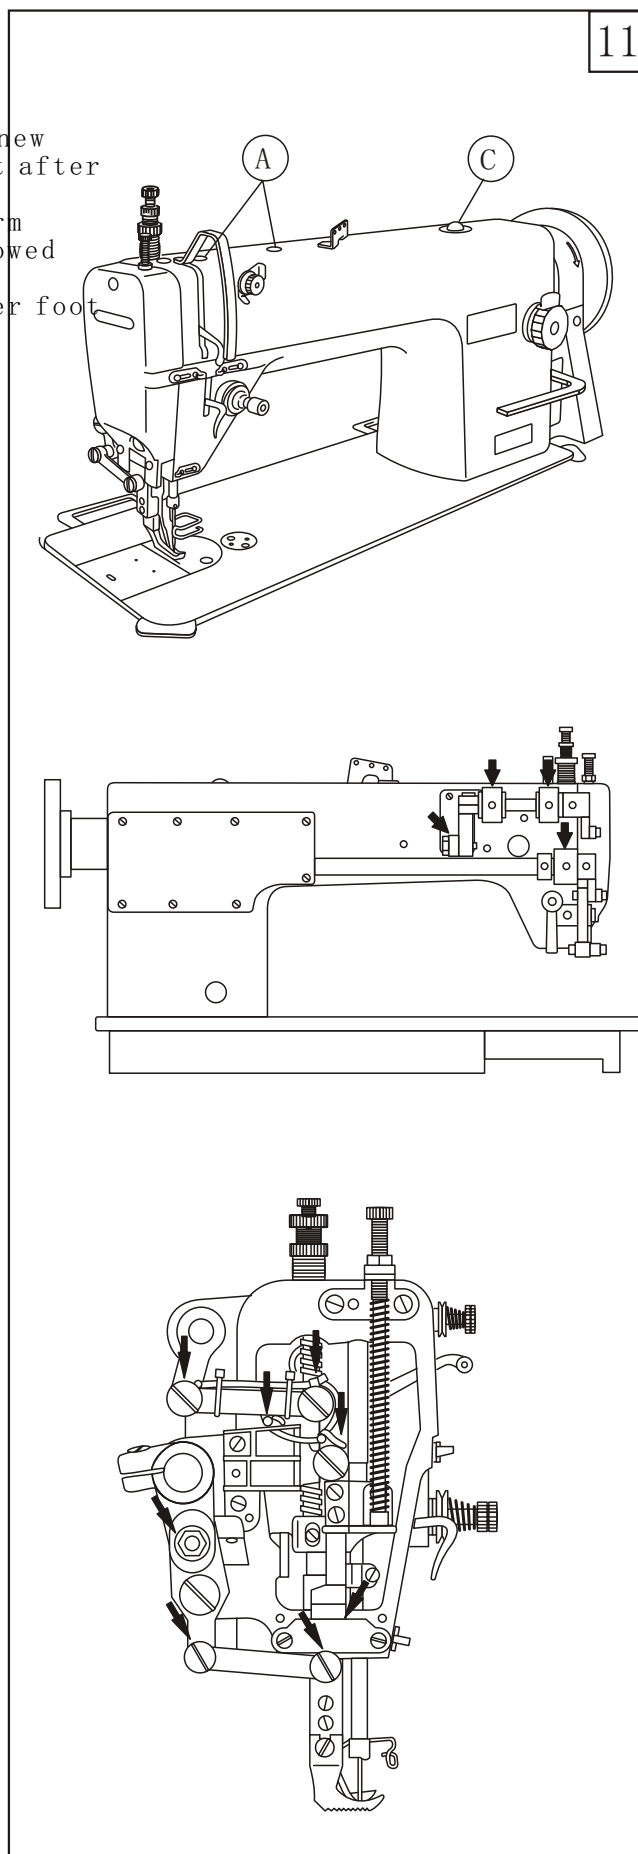

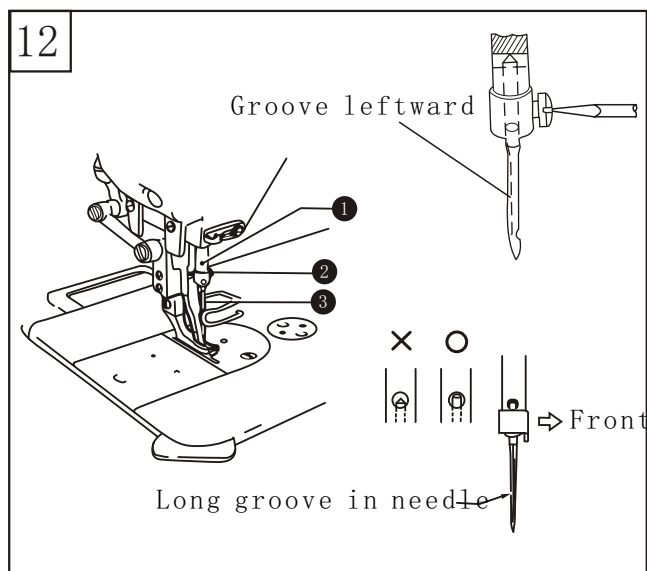


14. Installing the needle (Fig.12)

1. Turn the machine pulley to move the needle bar ① to its highest position;
2. Loosen the screw ②
3. Insert the needle ③ in a straight line as far as it will go, making sure that the long groove on the needle is at the left, and then securely tighten the screw ②

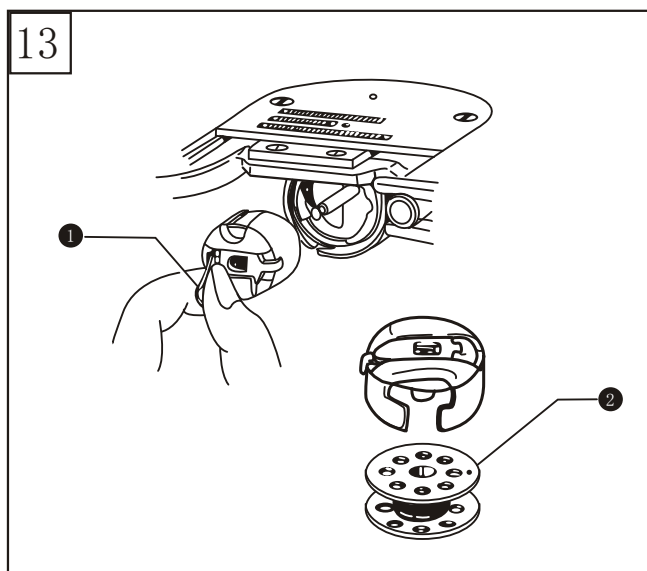

15. Removing the bobbin case (Fig. 13)

1. Turn the machine pulley to lift the needle bar to its highest position. Pull the latch ① of the bobbin case upward and then put the bobbin into the bobbin case, finally insert the complete bobbin case with bobbin into the hook shaft.
2. To remove the bobbin case, pull the latch and draw the bobbin case out of the hook.

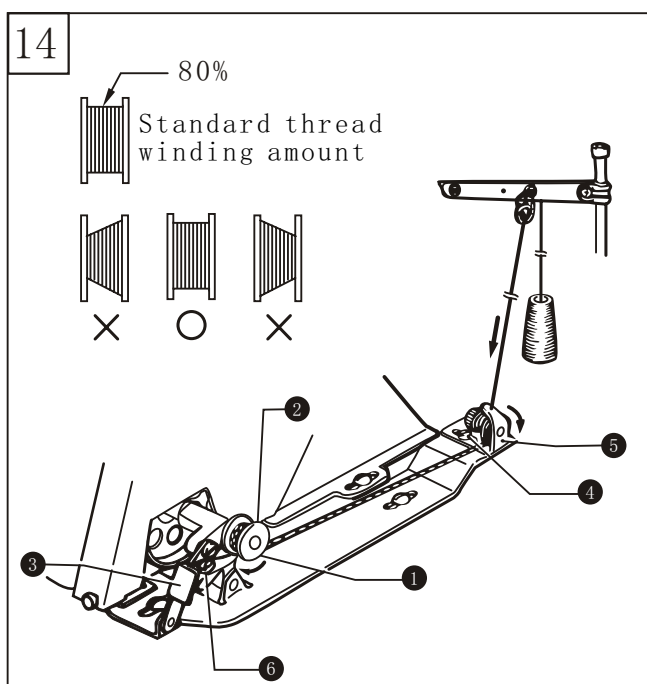


16. Winding the bobbin thread (Fig.14)

1. Turn the power on;
 2. Place the bobbin ① onto the bobbin winder shaft ②;
 3. Wind the thread several circles around the bobbin in the direction indicated by arrow;
 4. Push down the bobbin presser arm ③;
 5. Lift the presser foot;
 6. Depress the treadle, the winding operation will start;
 7. Once finished, the bobbin presser arm ③ will recover automatically.
- *If the thread winding is not neat and even, loosen the screw ④ to adjust the position of bobbin winder base.
- *Turn the screw ⑥ to adjust the bobbin winding amount
- Tighten the screw to increase the winding amount;
 - Loosen the screw to decrease the winding amount.
- Note:
The proper winding amount should be around 80% of the bobbin capacity.


17. Threading the bobbin thread (Fig.15)

1. Turn the machine pulley to lift the needle to its highest position;
2. The bobbin thread should be right twist, place the bobbin into the bobbin case;
3. Pass the thread through the slot ① and spring plate ②, and finally pull it out of the notch ③;
4. Check that the bobbin should turn clockwise if the thread is pulled;
5. Hold the latch ④, and place the bobbin case in the hook.

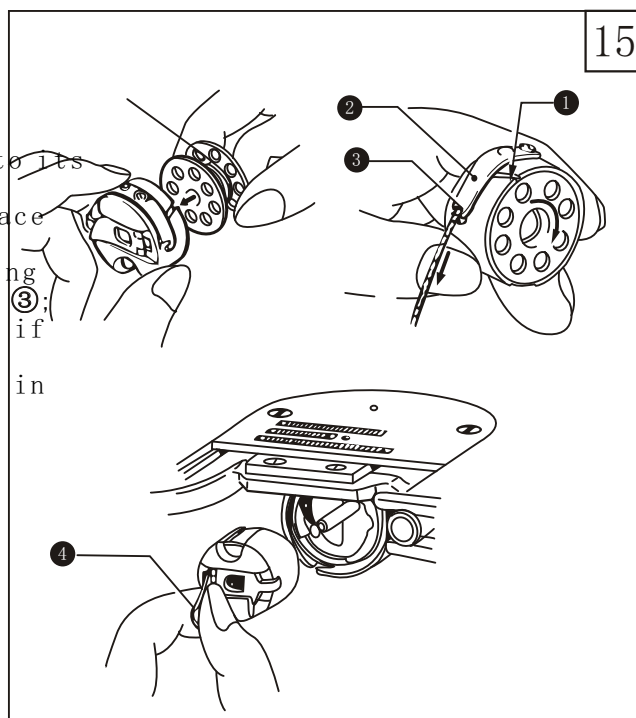


18. Threading the needle thread (Fig.16)

Raise the thread take-up lever to its highest position. This will make threading easier and will prevent the thread from coming out at the sewing start.

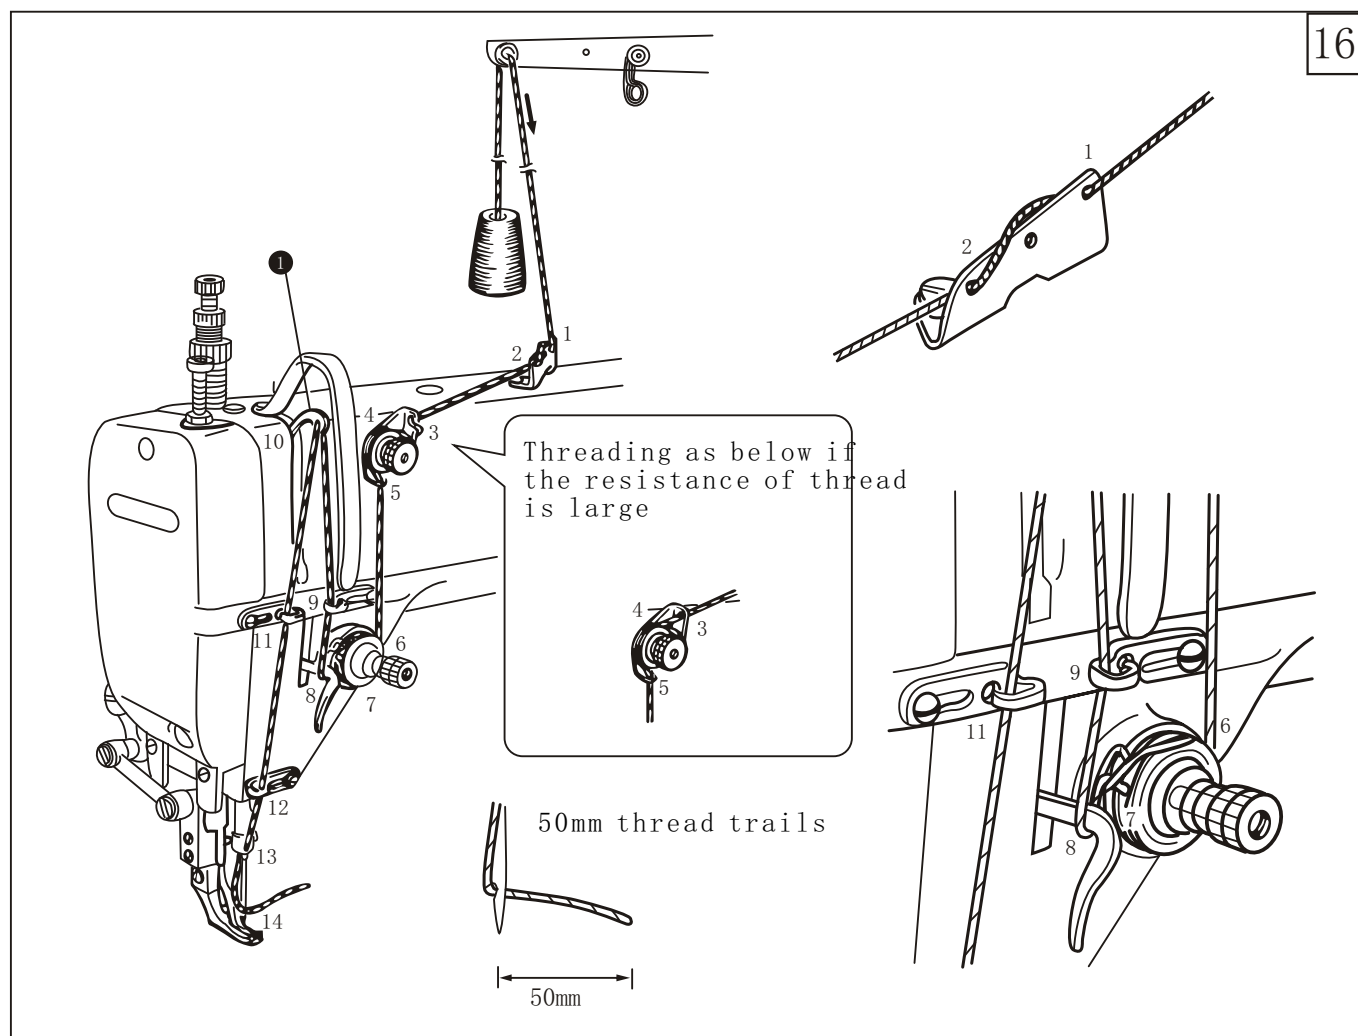

17

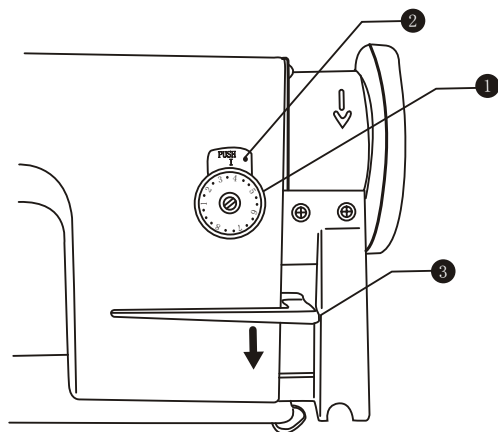


19. Adjusting the stitch length (Fig.17)

While press the stopper ②, turn the stitch length dial ① to make the number on the dial align with the mark on the stopper ②. The number is the stitch length in mm.

*The larger the number, the longer the stitch length will be.

*When turn the dial from a larger setting to a smaller setting, it will be easy to turn if the reverse lever ③ is pressed down.

18

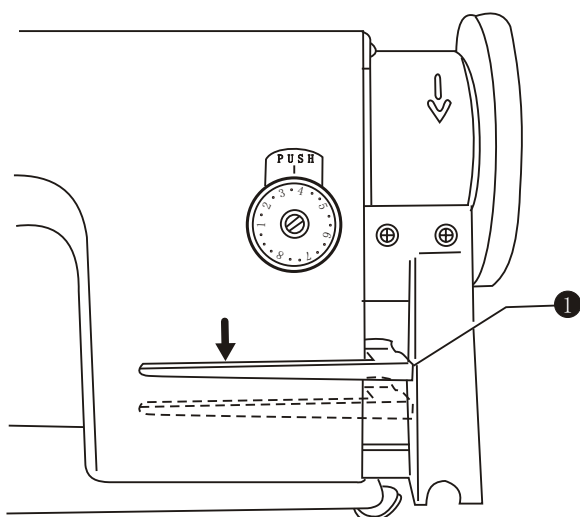


20. Sewing and backtacking (Fig.18)

1. Turn the power on;

2. Depress the treadle to start sewing.

When the reverse lever ① is pressed or the backtacking button is on during sewing, the feed will be reversed. After release, the feed will recover to normal.

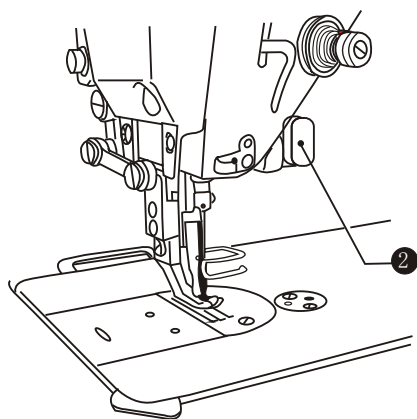

21. Adjusting the thread tension (Fig. 19)

19


Normal stitch



- increase the needle thread tension
- decrease the bobbin thread tension



- decrease the needle thread tension
- increase the bobbin thread tension

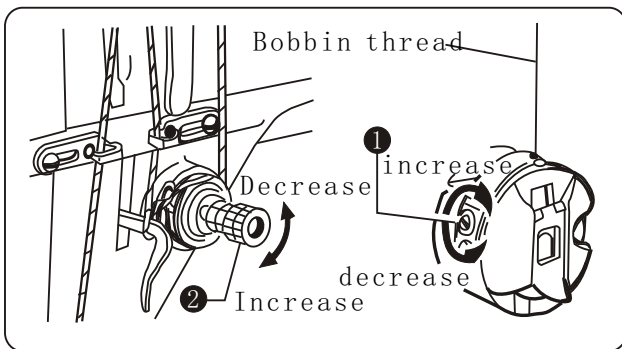

<Bobbin thread tension>

Adjust by turning the screw ① until the bobbin case drops gently by its own weight while the thread end coming out of the bobbin case is held.

<Needle thread tension>

After adjust the bobbin thread tension, adjust the needle thread tension so that a good, even stitch seam is obtained.

1. Lower the presser foot;
2. Adjust by turning the thread tension nut ②.

22. Adjusting the presser foot pressure (Fig. 20)

20

<Adjusting the presser foot pressure>


1. Loosen the lock nut ①;
2. Turn the adjusting screw ② to adjust the pressure of presser foot, if it's not enough, please turn the screw ⑤ to increase the pressure.

*The pressure should be as weak as possible, but strong enough so that the material doesn't slip.


3. Tighten the nut ①.

<Adjusting the walking foot presser>

1. Loosen the nut ③;
2. Turn the screw ④ clockwise to increase the pressure, on the contrary, turn the screw counterclockwise to decrease the pressure;
3. Tighten the nut ③.

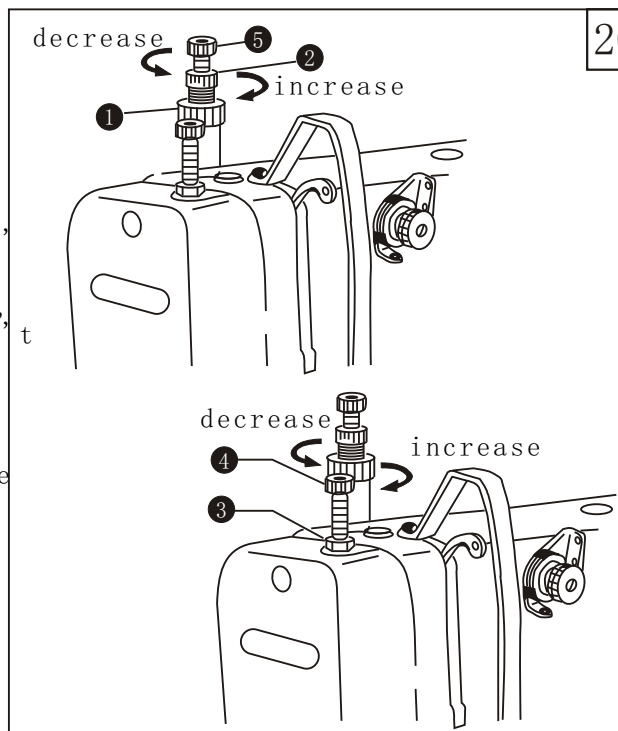


21

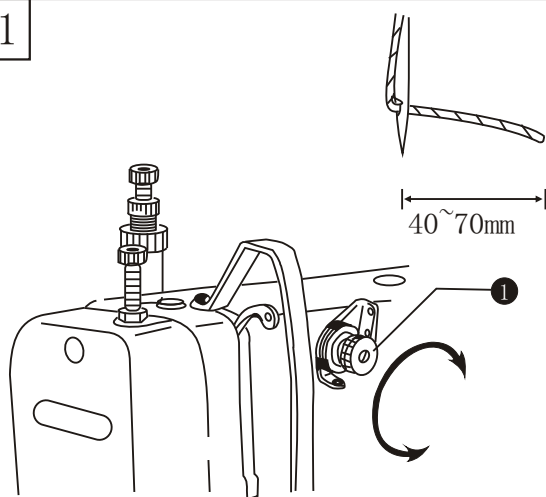

23. Adjusting the trailing length after thread trimming (Fig. 21)

- Turn the nut ① to adjust the trailing length
- At the time of thread trimming, the thread tension mechanism will release and the needle thread tension is only applied by the thread guide ①;
 - The standard trailing length for the needle thread is 40-70mm;
 - If increase the thread guide tension, the trailing length will be short; if decrease the thread guide tension, the trailing length will be longer.

22

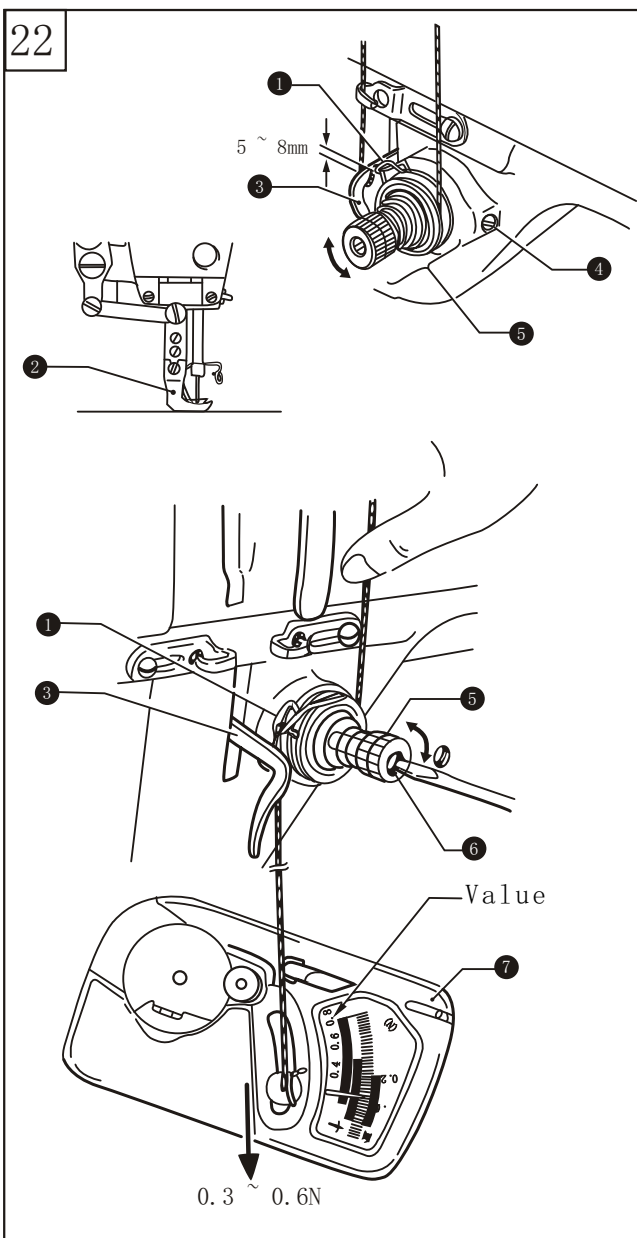

24. Adjusting the thread tension spring (Fig. 22)

★ The standard position of the thread tension spring ① is 5-8mm above the upper surface of the thread guide ③ when the presser foot ② is lowered.

1. Lower the presser foot ②;
2. Loosen the screw ④;
3. Turn the thread tension bracket ⑤ to adjust the spring position;
4. Tighten the screw ④.

★ The standard tension of the spring is 0.3-0.6N.

5. Push the needle thread with your finger until it is slightly higher than the thread tension bracket ⑤ and so that the upper thread is not pulled out;

6. Pull the needle thread down until the spring ① is at the same height with the upper surface of thread guide ③, and then measure the tension of the spring.


7. Insert a screwdriver into the slot of the thread tension stud ⑥, and turn the stud to adjust the tension of the spring ①.

Note:

If using a tension gauge ⑦ to measure the tension, take the reading from the scale on the side of the red line.


25. Adjusting the upper thread guide (Fig. 23)

The standard position of upper thread guide ① is where the screw ② is in the center of the adjustable range of upper thread guide.
To adjust the position, loosen the screw ② and move the thread guide.
If stitch the heavy materials, move the thread guide leftward. (To increase the thread take-up tension)
If stitch the light materials, move the thread guide rightward. (To decrease the thread take-up tension)

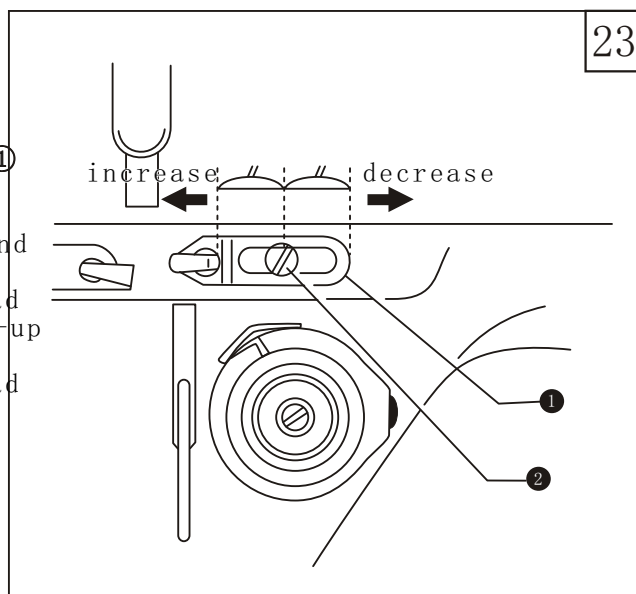


26. Adjusting the presser foot height (Fig. 24)

The standard height of presser foot ① is 8mm when it is lifted by hand.
1. Loosen the screw ③ to lift the presser bar
2. Put a measurement gauge with 8mm height under the presser foot;
3. Loosen the screw ④ and adjust the height of presser foot;
4. Tighten the screw ④.

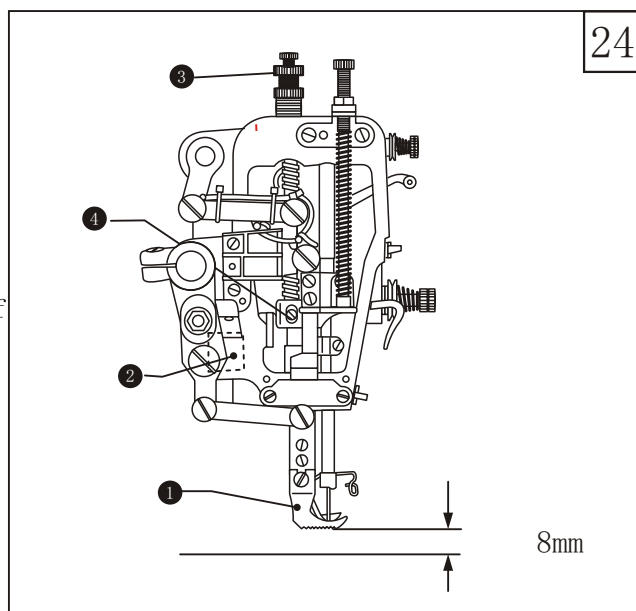


27. Adjusting the feed dog height (Fig. 25)

1. Set the stitch length maximum, when the feed dog ① is at its highest position above the needle plate, the standard height is 1.2mm
2. Loosen the screw ② and turn the feed lifting arm ③ to adjust the height of feed dog.

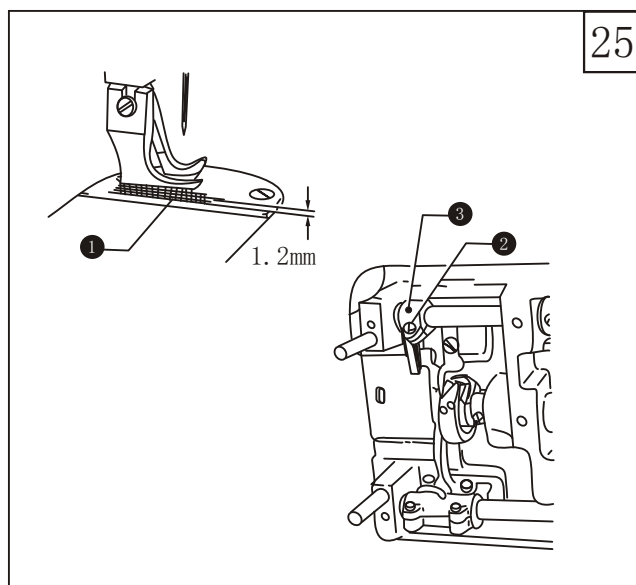

26

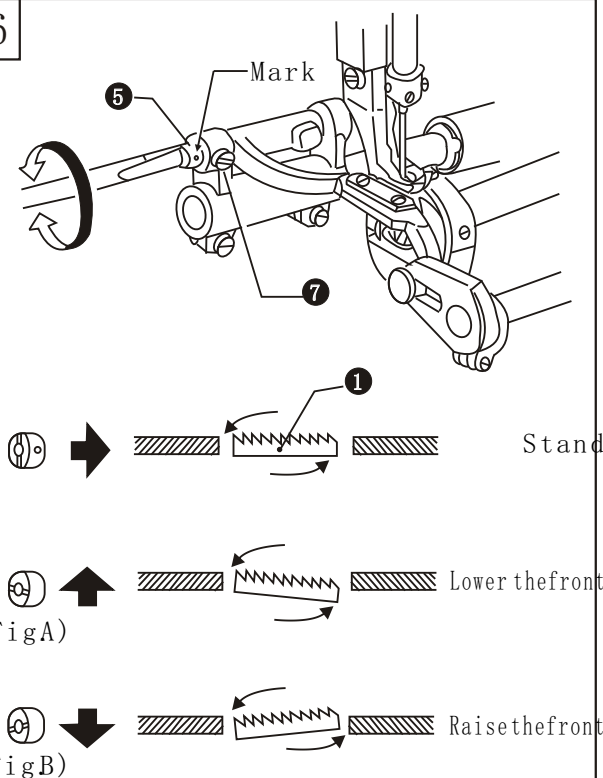

28. Adjusting the feed dog angle (Fig. 26)

The standard angle of the feed dog is: when the feed dog is at its highest position above the needle plate, the Mark on the feed bracket shaft is on the horizontal position.

1. Turn the machine pulley to lift the feed dog to its highest position;
2. Loosen the screw ⑦;
3. Turn the feed bracket shaft in the direction of the arrow within a range of 90° with respect to the standard angle position.


* In order to prevent puckering, lower the front of the feed dog (Fig. A)

* In order to keep the materials straight, raise the front of the feed dog (Fig. B)

4. Securely tighten the set screw ⑦.

It's necessary to adjust the feed dog height again after this adjustment.

27

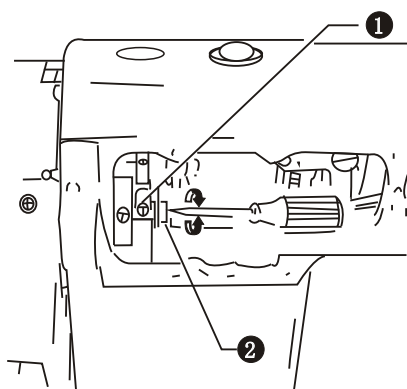

29. Adjusting the difference of stitch length between the forward and backtacking (Fig. 27)


1. Remove the rear cover;
2. Loosen the screw ① and turn the connecting stud ②

* Turn the stud ② clockwise, the forward stitch length will be longer and the backtacking stitch length will be shorter;

* Turn the stud ② counterclockwise, the forward stitch length will be shorter and the backtacking stitch length will be longer;

3. Tighten the screw ①.

28

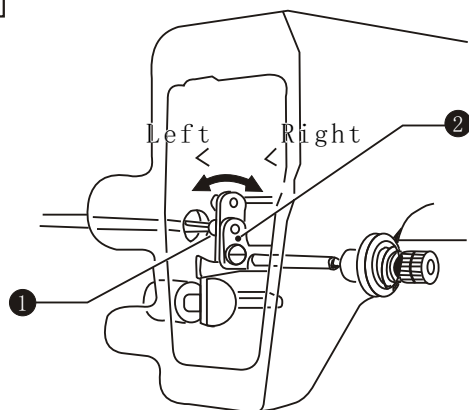

30. Adjusting the tension release (Fig. 28)

The opening time of the thread tension discs can be adjusted.

Remove the rubber cap on the rear of arm, and turn the screw ①, then the thread release cam ② can be moved left or right.

Move the cam rightward, the release time will be slow

Move the cam leftward, the release time will be quick.

31. Adjusting the timing of needle and feed mechanism (Fig. 29)

The standard timing is when the feed dog is lowered from its highest position until it is flush with the top of the needle plate ②, and the needle eye ③ is also aligned horizontally with the surface.

Adjust by changing the phases of feed cam and eccentric wheel UD

1. Remove the rear cover

2. Turn the machine pulley in reverse direction, set the second screw ④ on the gear of upper shaft as reference mark, make the third screw ⑤ of eccentric wheel UD slightly lower than the reference mark screw ④;


3. Continue to turn the machine pulley, set the second screw ⑥ of eccentric wheel UD as reference mark, make the third screw ⑦ of feed cam slightly higher than the reference mark screw ⑥.

4. If need a non-timing position, loosen the three screws of eccentric wheel UD, adjust the eccentric cam ⑧ in the direction of arrow (A) or (B)

To increase the tension of thread, turn the eccentric cam ⑧ to direction (A)


To avoid the needle bent, turn the eccentric cam ⑧ to direction (B)

5. After adjustment, tighten all of the screws.

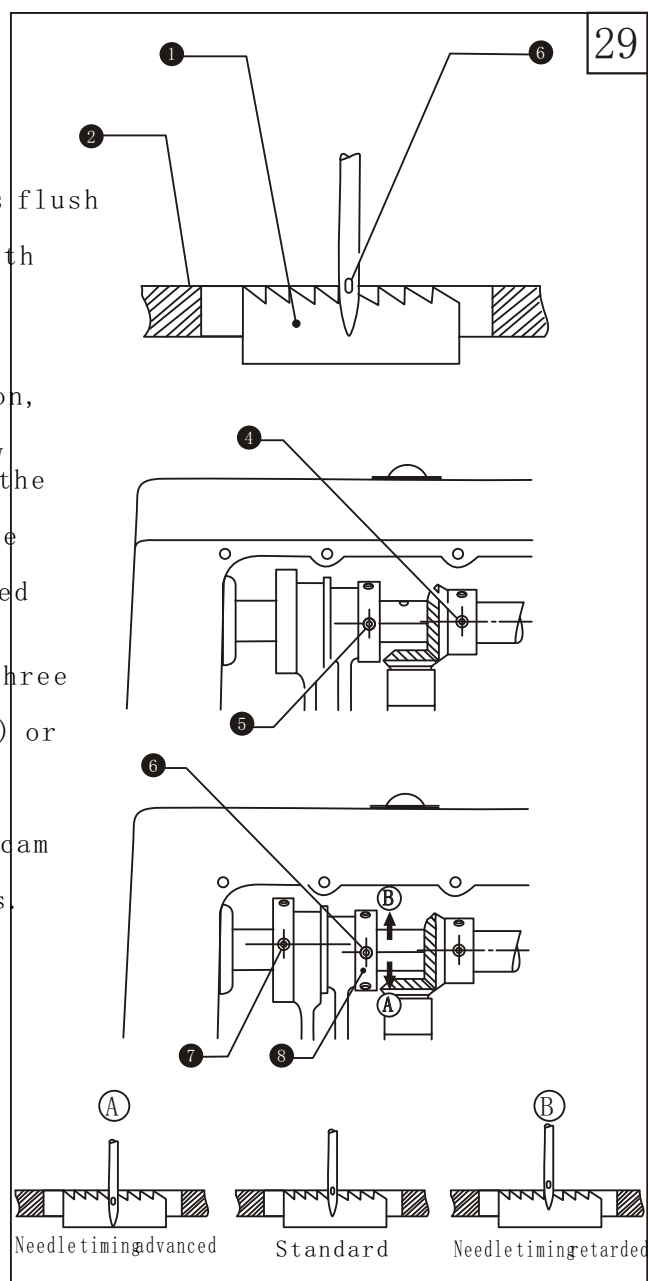


32. Adjusting the rotary hook lubrication amount (Fig. 30)

Tilt back the machine head, and turn the oil adjustment screw ① to adjust the hook oiling amount.

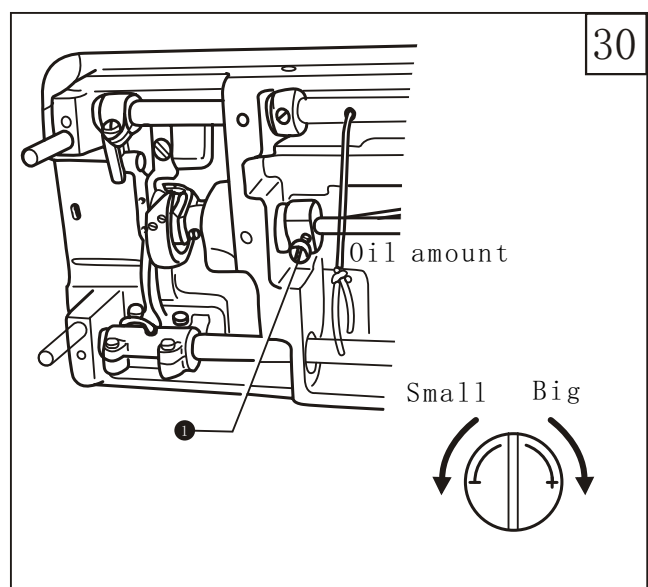

31

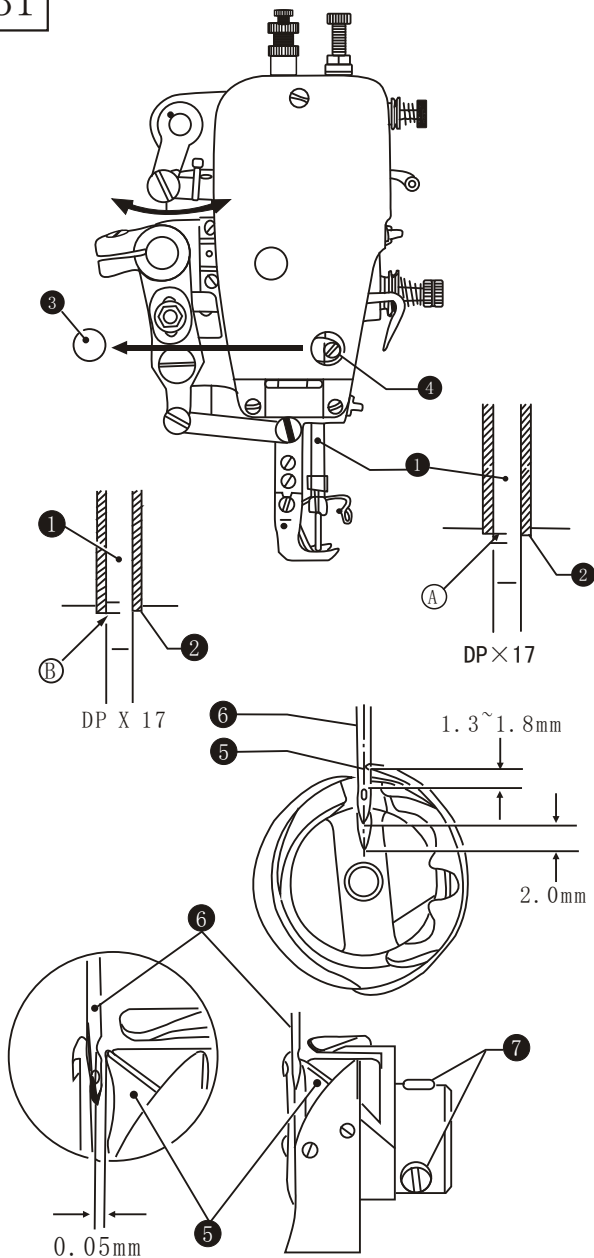

33. Adjusting the height of needle bar and the timing with hook (Fig. 31)

When the needle bar ① is at its lowest position, the top reference line (A) on the needle bar should be aligned with the bottom edge of the needle bar bush ②.

1. Turn the machine pulley to lower the needle bar to its lowest position;
2. Take out the rubber cap ③;
3. Loosen the screw ④, and move the needle bar ① to proper position;
4. Tighten the screw ④;
5. Close the rubber cap ③.

Lift the needle bar ① from the lowest position, when the second reference line (B) on the needle bar is aligned with the bottom edge of the needle bar bush ②, the tip ⑤ of the hook should be aimed at the center of needle ⑥.


1. Turn the machine pulley to raise the needle bar ① from its lowest position until the reference line (B) is aligned with the bottom edge of the needle bar bush ②

* When the needle bar moves up 2mm, the clearance between the upper of needle hole and the hook tip should be 1.3-1.8mm

2. Loosen the screw ⑦, and make the hook tip aimed at the center of needle ⑥, the clearance between the hook tip and needle should be 0.05mm

3. Tighten the screw ⑦.

32

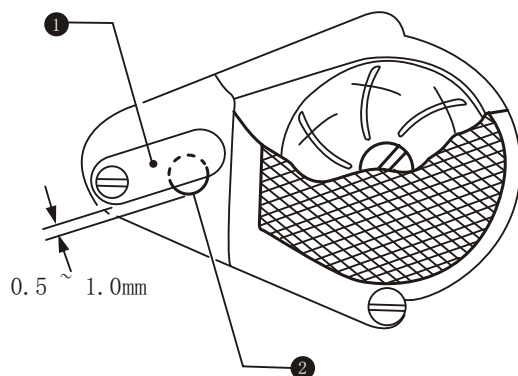

34. Adjusting the oil pump (Fig. 32)

If the oil is not circled observed from the oil gauge window at a lower sewing speed, turn the oil adjustment plate ① to cover the oil hole ②.

35. Adjusting the lifting amount of presser foot (Fig. 33)

33

1. Vertical movement of presser foot and walking foot

★ The walking foot ① and presser foot ② move vertically one after another

★ Usually the stroke of walking foot and presser foot is same or the stroke of presser foot is slightly lower.

Place the thread take-up lever at the lowest position, and lower the presser bar lifter, loosen the screw ③ and move the upper feed lifting cam ④.

Move it rightward to make the stroke of two feet be equal

Move it leftward to make the stroke of presser foot be smaller.

2. Adjusting the lifting amount of presser feet
Adjust the lifting amount of two feet to match the materials to be sewn.

Loosen the screw ⑤, and move the screw upward to increase the lifting amount or move the screw downward to decrease the lifting amount.

3. Adjusting the forward/backward clearance of the two feet

To keep the front groove of walking foot not strike the rear of the presser foot, the clearance of C must be kept about 3mm.

Loosen the screw of feed arm R, and then turn the feed rock shaft ⑥ to adjust.


4. Adjusting the feed amount of walking foot (Fig. A)

★ The standard ration of feed amount between feed dog and walking foot is 1:1

The feed amount of walking foot can be adjusted to suit for the materials to be sewn.


Loosen the nut ⑦, and move the slide block ⑧
Upward: decrease the distance L to make the feed amount be smaller

Downward: increase the distance L to make the feed amount be larger

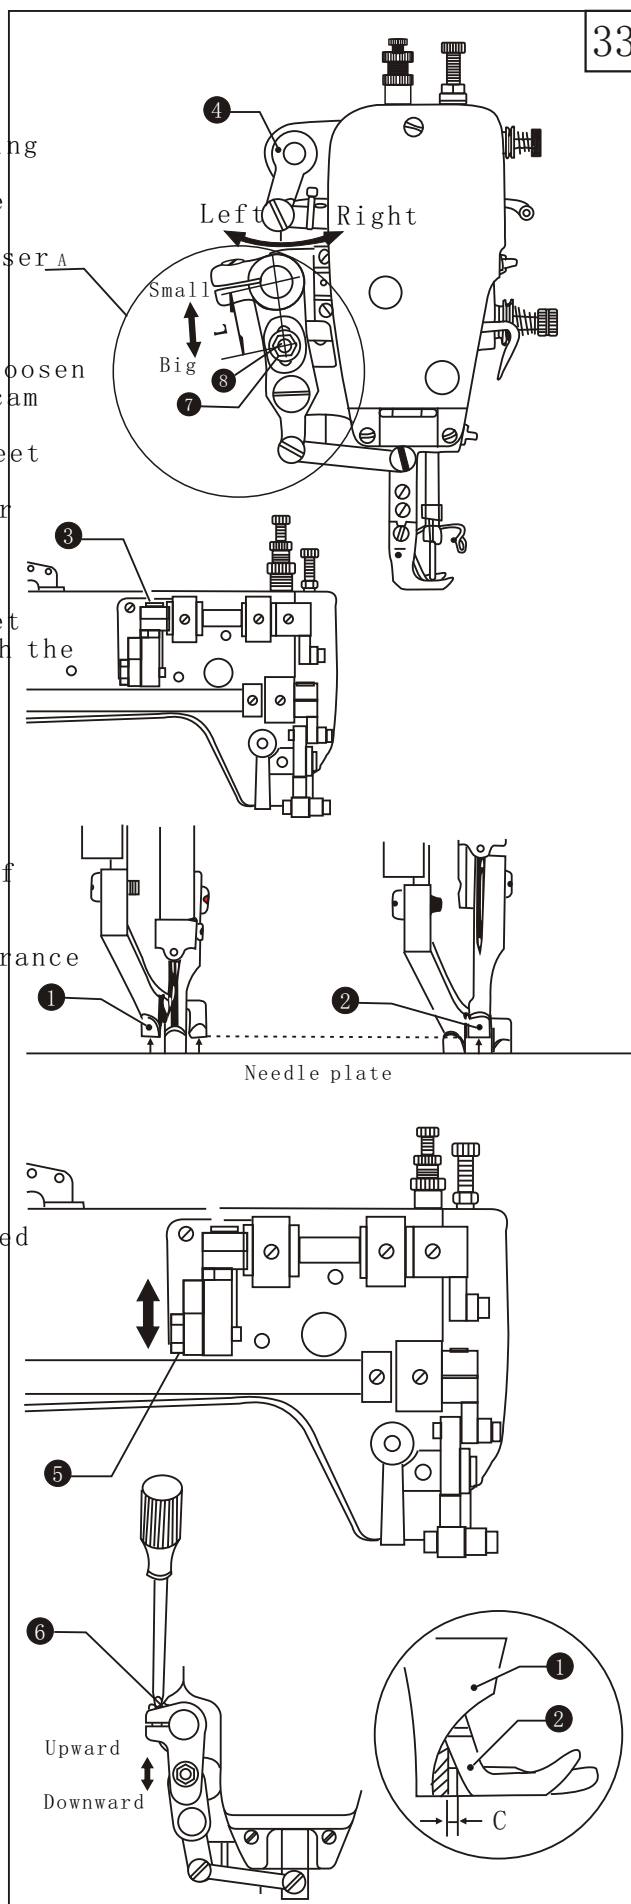

36. Adjusting the synchronizer (Fig. 34)

34

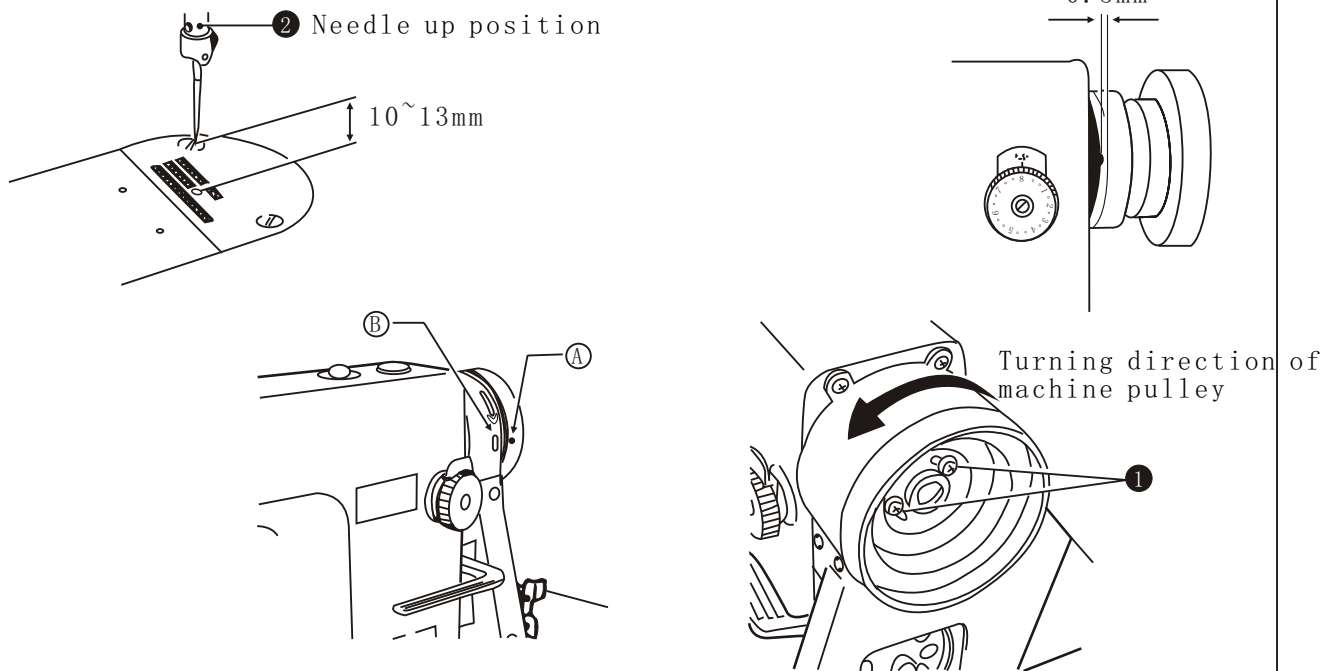

The synchronizer consists of two elements which are used to detect the needle position. Both of two signals of needle down and thread trimming are controlled by one element.

● Turn the power on, the machine will stop at the needle up position after running, and the Mark on the machine pulley will be in the range of hole (B) in the belt cover, meanwhile, the distance between needle plate and needle tip should be 10-13mm.

● if need to adjust, please refer to the procedure below

■ Adjusting the needle up position

1. Turn off the power;
2. Loosen the two screws ①;
3. Move the two screws sets in the direction of machine pulley turning to raise the needle bar, the contrary, to make the needle up position lower;
4. Tighten the two set screws ①.

■ Needle down and thread trimming signals


Do not adjust the needle down stop position

Note:

- The synchronizer is pre-adjusted in the factory. Do not set the synchronizer when move the machine pulley.
- When installing the pulley, make sure that there should be a 0.5mm clearance between the synchronizer and pulley edge.


37. Adjusting the trimming mechanism

1. Trimming mechanism (Fig. 35)

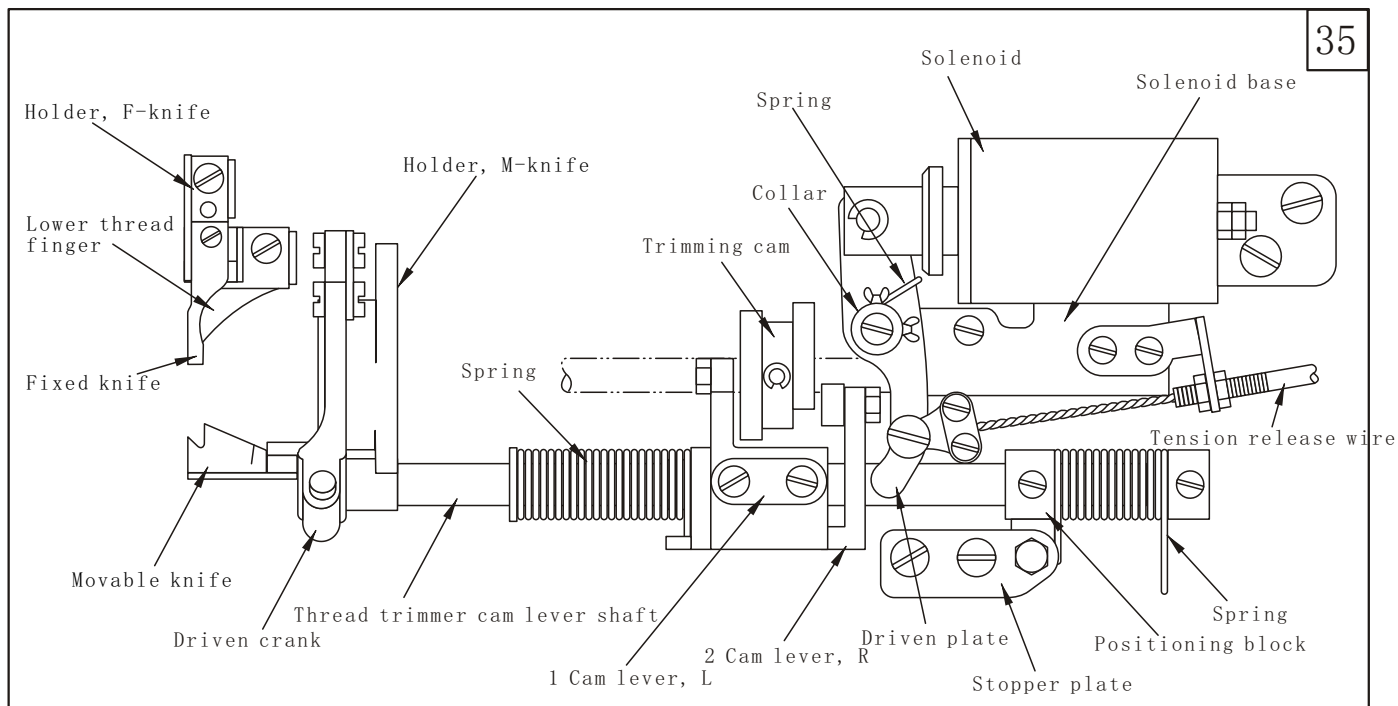


2. The relation between fixed knife and movable knife (Fig. 36)


- (1) The clearance between fixed knife ① and movable knife ② should be 0.3mm
- (2) Adjust the position illustrated by the Fig.
- (3) Move the bobbin case opener and adjust the holder of fixed knife.

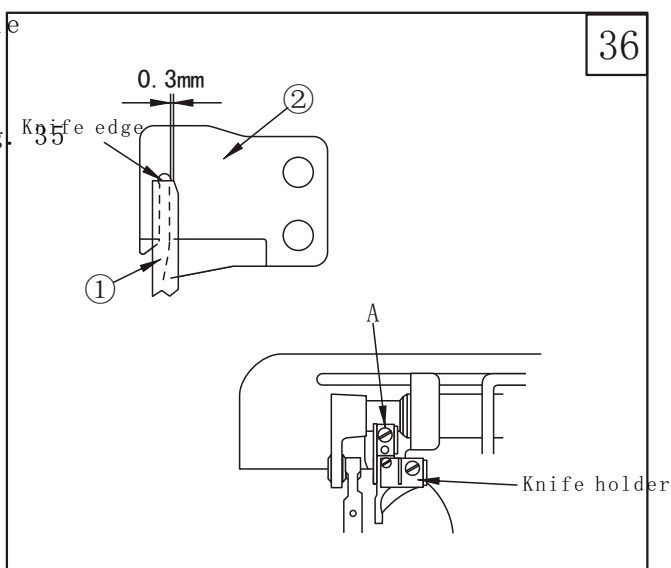

3. Thread trimmer cam lever shaft

- (1) Install the shaft ① on the machine bed first;
- (2) Install the cam lever L on the shaft ① as illustrated;
- (3) Slightly turn the shaft ①, and install the positioning block ② as illustrated.

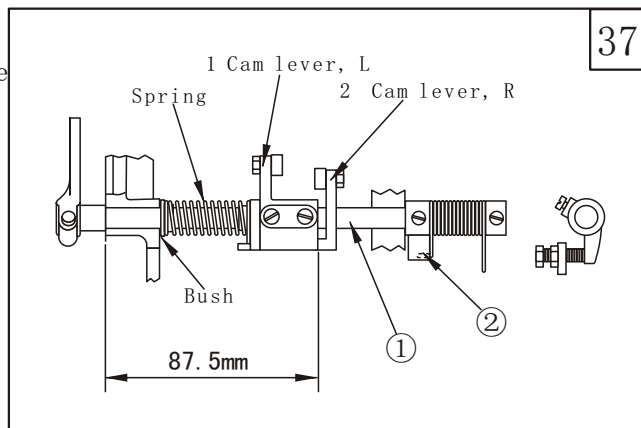

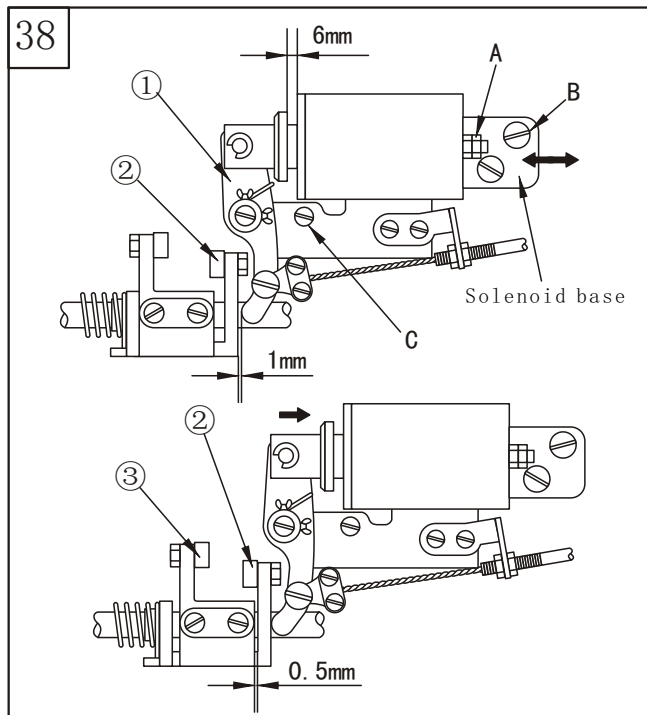

4. Installing the trimming solenoid (Fig. 38)

(1) The stroke of solenoid

a. The standard stroke is 6.0mm


b. Turn the nut (A) to adjust the stroke

(2) Installing the solenoid

a. Fixed the solenoid by the screws B and C;

b. Be sure to keep the clearance between the driven plate ① and cam lever R ② 1mm;

c. When the solenoid is active, there should be a 0.5mm clearance between the cam lever L ③ and cam lever R ②. If need to adjust, please move the solenoid base shown by the arrow.

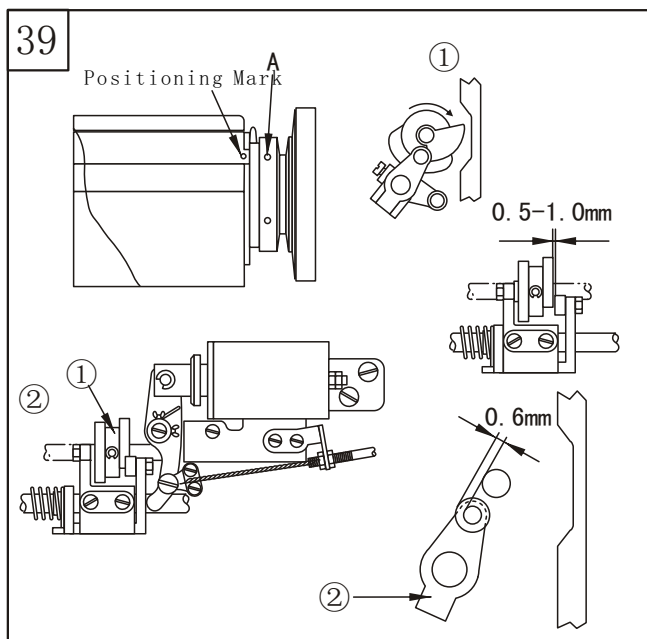


5. Installing the trimming cam (Fig. 39)

(1) Align the second mark A on the machine pulley with the Positioning Mark on the arm;

(2) Set the solenoid active and turn the trimming cam ① until the cam is touched with the roller, then fix the cam;

(3) Set the solenoid inactive and make the cam lever ② restore to the original position, there should be a 0.5-1.0mm clearance between cam and roller.

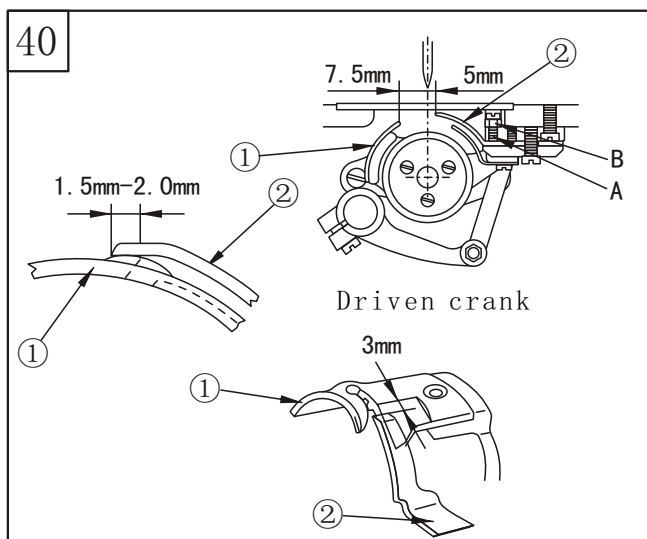

6. Adjusting the knives (Fig. 40)

(1) The relation between fixed knife and movable knife

The clearance between movable knife ① and needle center is 7.5mm, and the clearance between fixed knife ② and needle center is 5mm.

(2) Set the solenoid active, the movable knife ① will turn rightward driven by the trimming cam.

When the movable knife ① moves to its left furthest position, the clearance between two knives ① and ② should be 1.5-2.0mm

(3) Adjusting the trimming solenoid

A. If the thread trimming not smoothly, especially the thick thread used, just need to increase the trimming pressure;

B. Adjusting the trimming pressure: loosen the nut B, adjust the screw A to get the reasonable pressure.




38. Clean (Fig. 41)

41

1. Raise the presser foot;
2. Remove the two screws ① and needle plate ②;
3. Clean the feed dog with a soft brush;
4. Install the needle plate ② by two screws ①.


5. Turn the machine pulley slowly and check if the needle drops into the hole center of needle plate
★ If not
● Check if the needle is bent
● Loosen the screw ①, and reinstall the needle plate ②

6. Turn the machine pulley and lift the needle above the needle plate, check if the needle tip is blunt, if yes, change a new one.
7. Tilt back the machine head
8. Remove the bobbin case ④
9. Clean the hook with a soft cloth and check if the hook is worn out
10. Take out the bobbin from the bobbin case, and clean the bobbin case with a soft cloth
11. Insert the bobbin into the bobbin case and place the bobbin case back into the machine
12. Clean the dust on the filter (A) of oil pump.

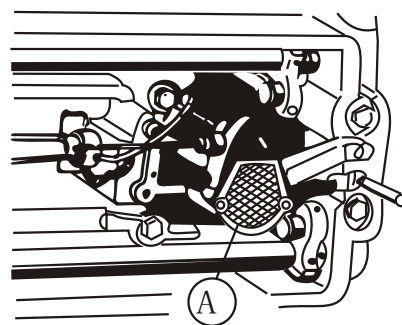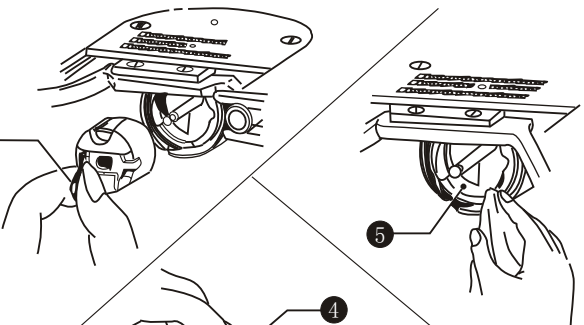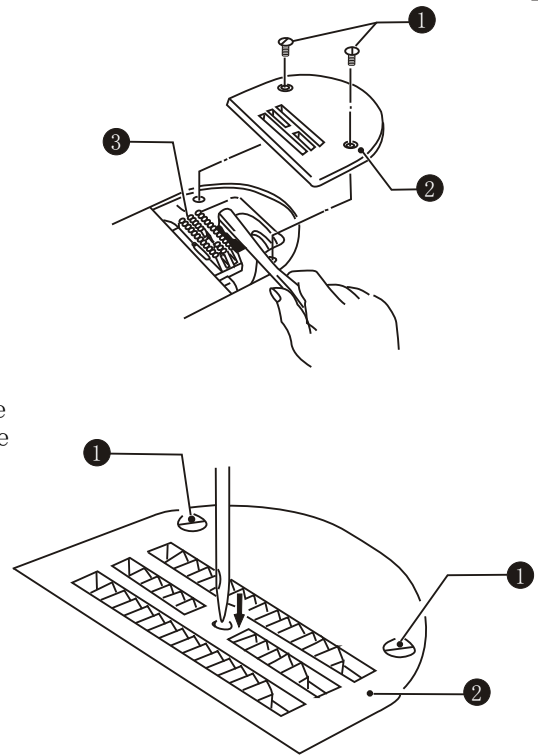

Parts Manual


1. Casting mechanism

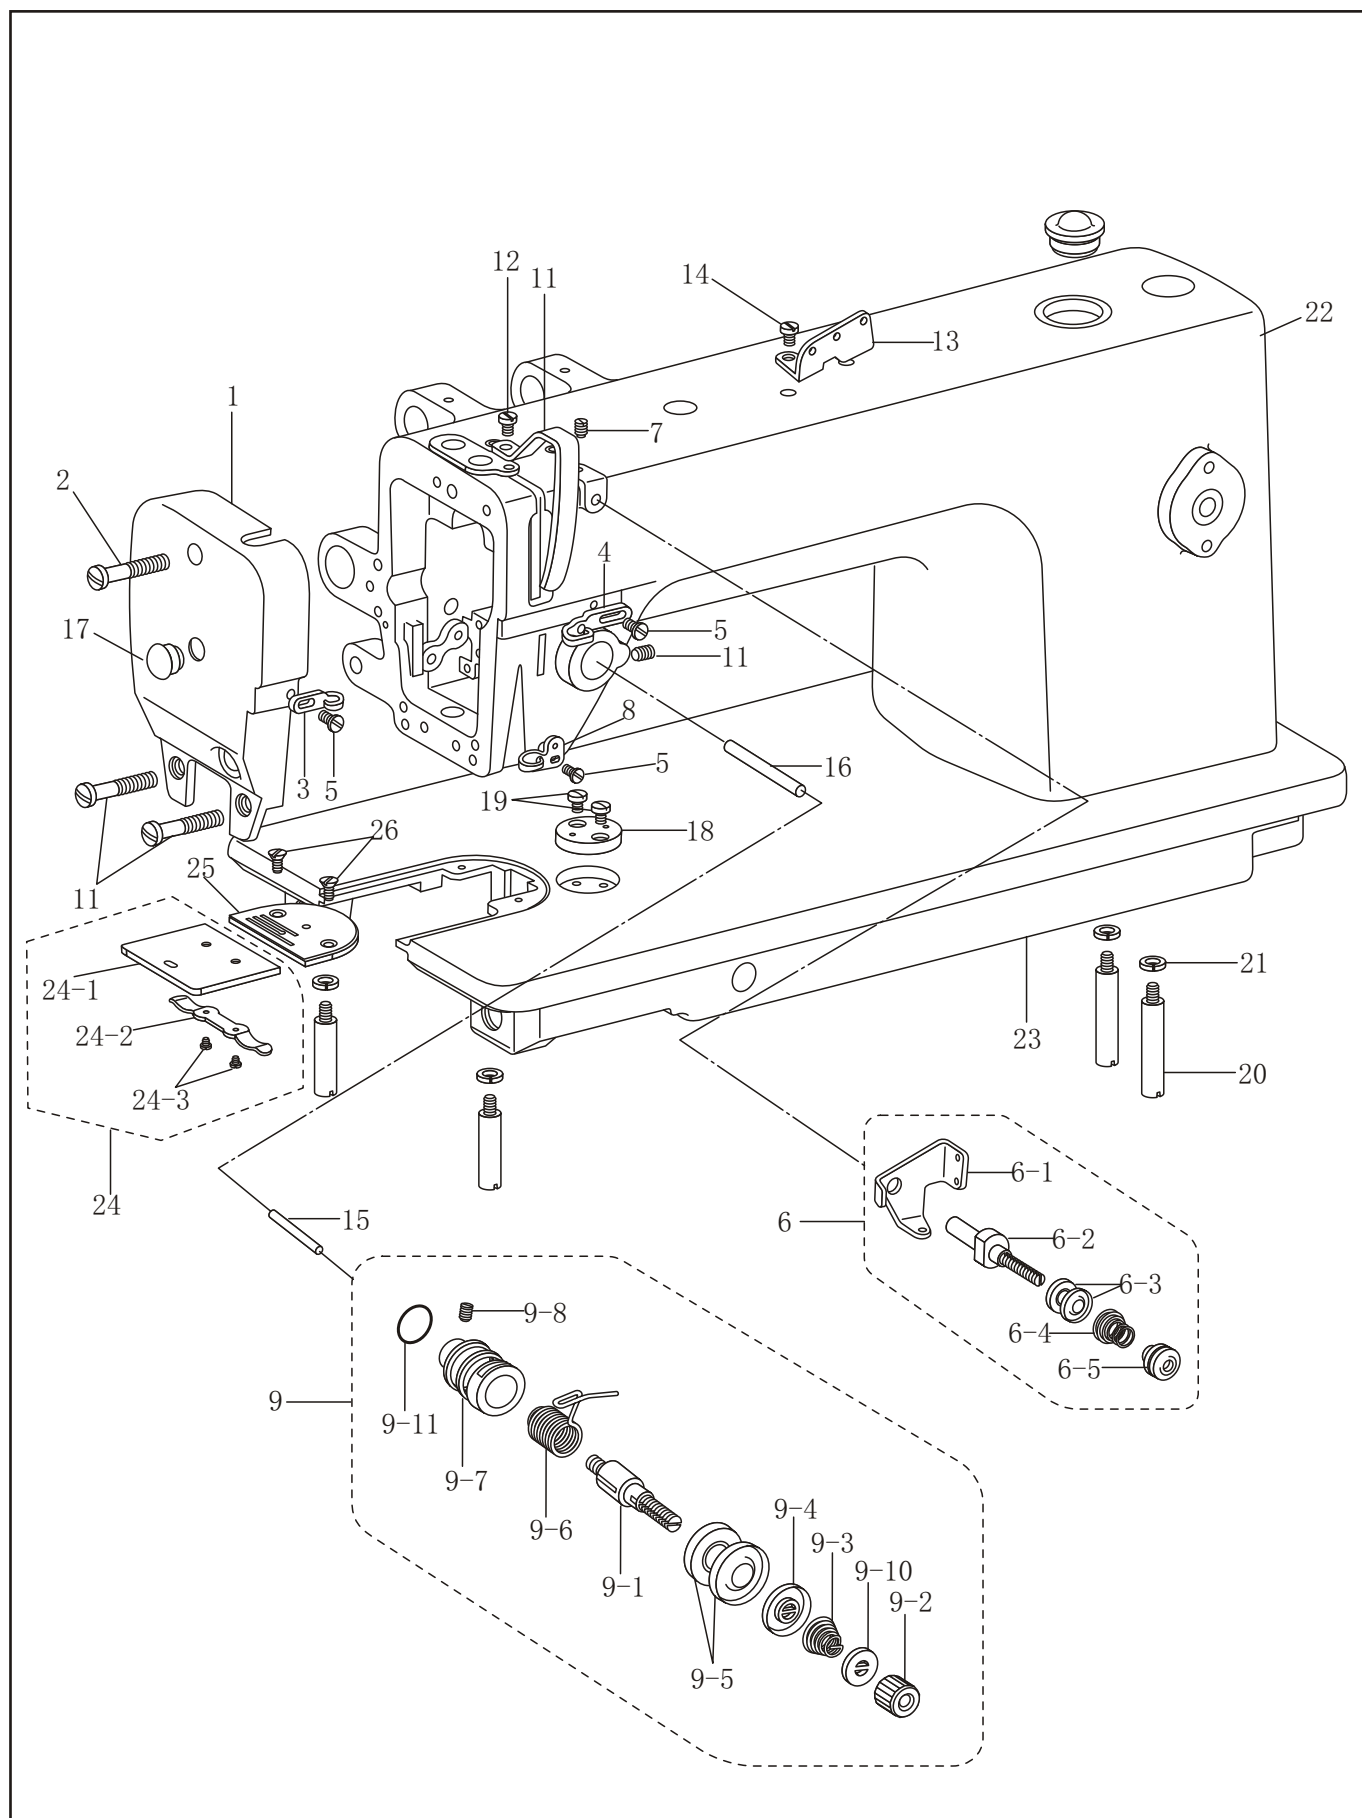

1. Casting mechanism

No.	Part Number	Name	Qt.	Remark
1	1KT1-002	Face plate	1	
2	7WF4-004	Screw	3	
3	22T1-003C5	Thread guide	1	
4	22T1- 014	Thread guide	1	
5	22T1- 003C6	Screw	3	
6	36T2- 006D	Thread guide assy.	1	
6-1	36T2-006D1	Thread guide	1	
6-2	36T2-006D2	Pre-tension stud	1	
6-3	22T2-009E3	Tension disc	1	
6-4	2KT2-011	Tension spring	2	
6-5	36T2-006D4	Adjusting screw	1	
7	20T1-004	Set screw	1	
8	7WF4-015	Thread guide	1	
9	33T4-008C	Thread tension bracket assy.	1	
9-1	22T1-012F1	Tension stud	1	
9-2	22T1-012F2	Tension nut	1	
9-3	33T4-008C1	Tension spring	1	
9-4	22T1-012F4	Disc presser	1	
9-5	22T1-012F5	Disc, tension	1	
9-6	22T1-012F6	Thread take-up spring	1	
9-7	22T1-012F7	Thread tension bracket	2	
9-8	22T1-012F8	Set screw	1	
9-9	22T1-012F9	Stopper	1	
9-10	22T1-012F10	O ring	1	
9-11	22T1-012F11	Set screw	1	
10	22T1-013	Cover	1	
11	1KT1-003	Screw	1	
12	22T2-004	Thread retainer	1	
13	36T2-004	Screw	1	
14	36T2-005	Tension release pin	1	
15	2KT4-002	Tension release stud	1	
16	2KT4-003	Rubber plug	1	
17	7WF4-030	Ruler plate	1	
18	7WF4-005	Screw	1	
19	1WF3-025	Bed leg	1	
20	7WF4-013	Washer, spring	1	
21		Arm	1	
22	241WF1-002	Bed	2	
23	241WF1-001	Slide plate assy.	4	
24		Slide plate	4	GB93 6
24-1	7WF4-006	Spring plate	1	
24-2	20T1-013F ₂	Screw	1	
24-3	20T1-013F ₃	Needle plate	1	
25	2KT2-003	Screw	1	
26	22T1-020	Screw	2	


2. Needle bar and thread take-up mechanism

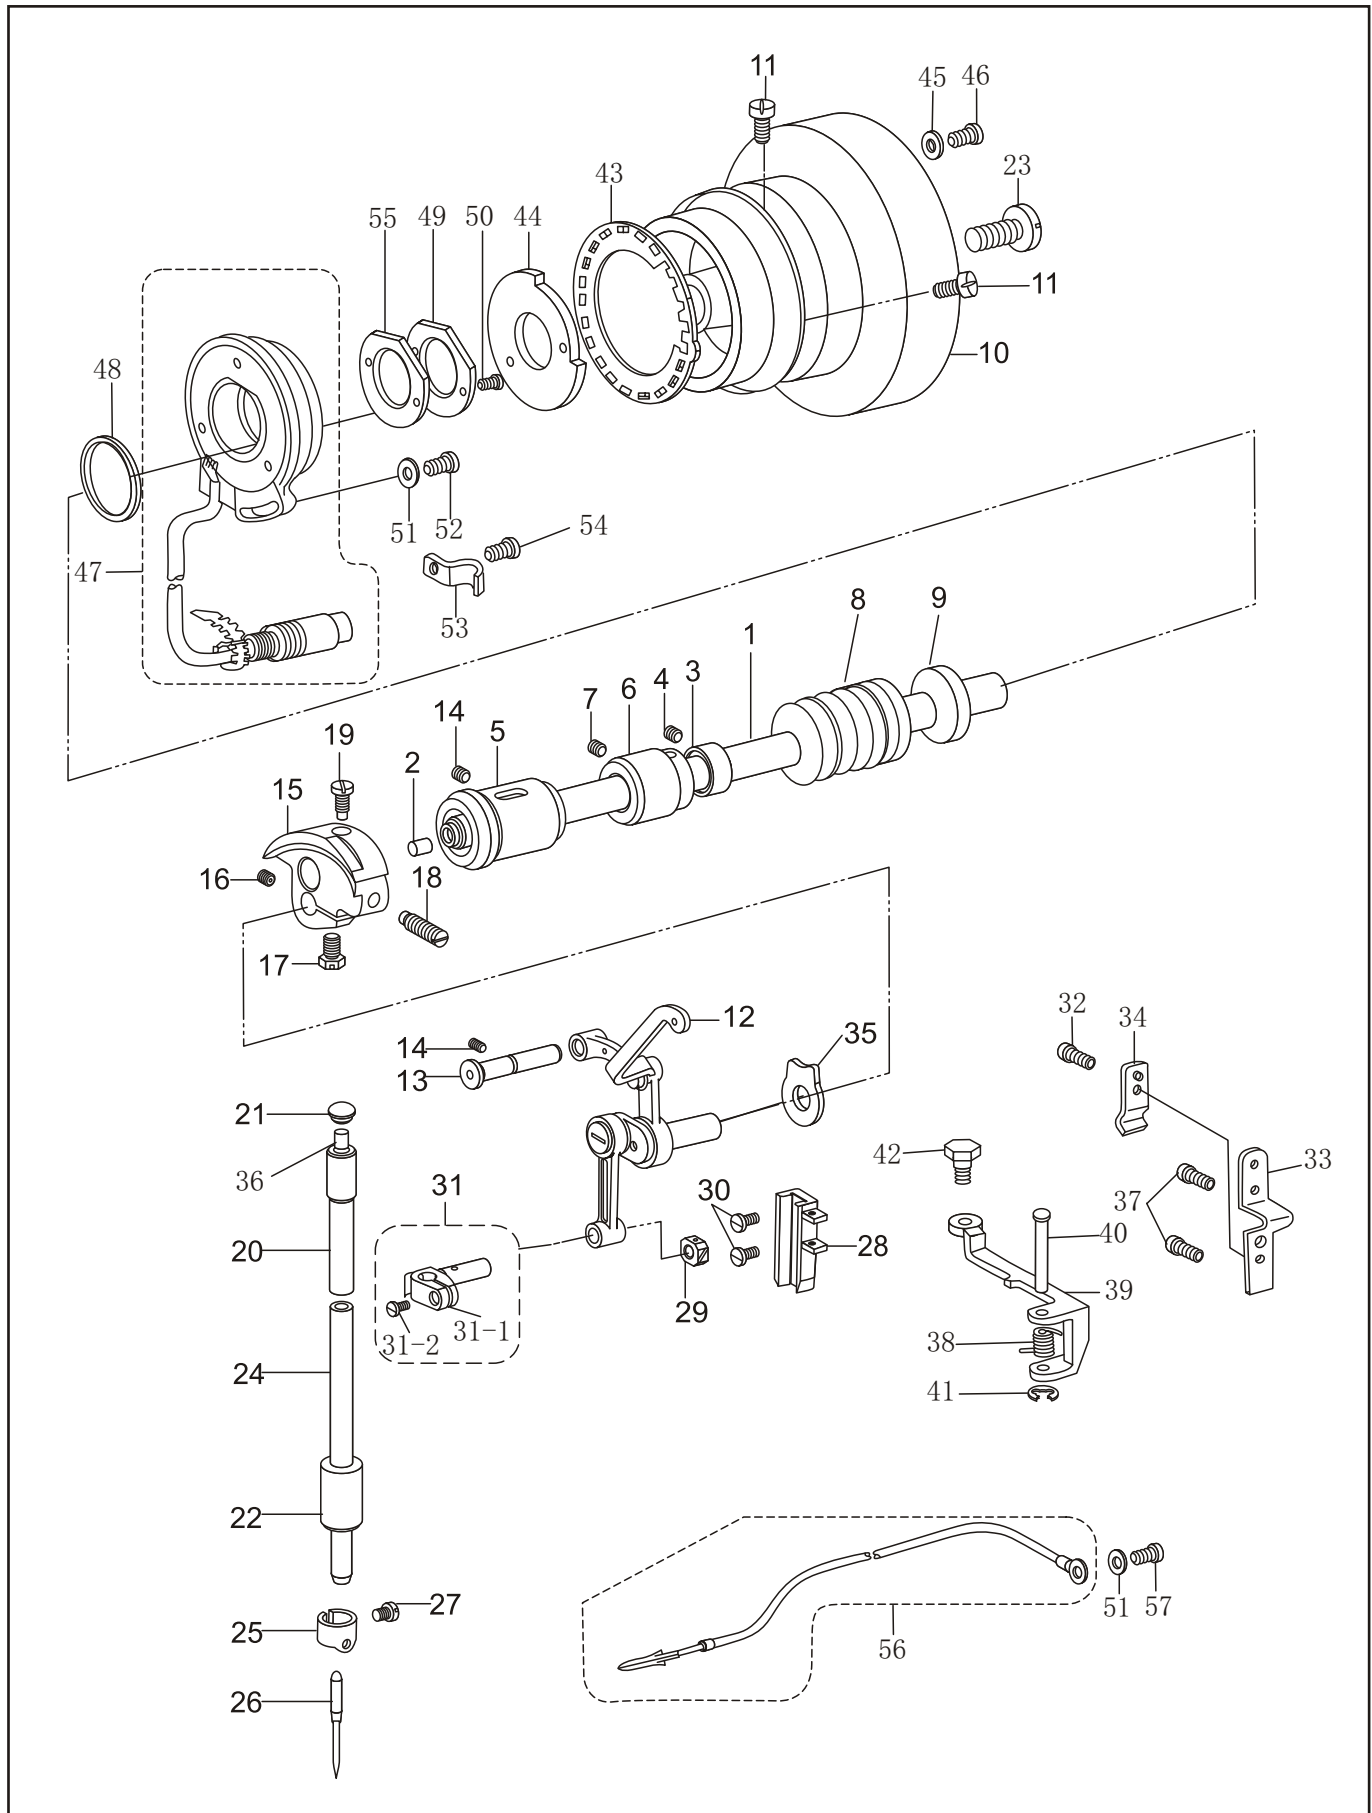

2. Needle bar and thread take-up mechanism

No.	Part Number	Name	Qt.	Remark
1	241WF2-001	Upper shaft	1	
2	22T3-001A ₂	Robber cap	1	
3	22T3-002B ₁	Collar	1	
4	22T3-002B ₂	Screw	2	
5	4WF1-006A	Bush, L	1	
6	4WF1-002	Bush, M	1	
7	J0.0.40	Set screw	1	
8	81WF2-010	Bush, R	1	
9	2KT1-005	Oil seal	1	
10	122WF2-001	Hand wheel	1	
11	22T3-007C ₂	Screw	1	
12	33T1-004B	Thread take-up lever set	2	
13	33T1-002	Support shaft	1	
14	J0.0.5	Set screw	1	
15	4WF1-007A	Thread take-up crank	2	
16	33T1-006C ₃	Screw	1	
17	22T2-005B ₃	Screw	1	
18	33T1-006C ₂	Screw	1	
19	20T2-007	Bush, U	1	
20	22T2-008	Rubber cap	1	
21	22T2-011	Bush, D	1	
22	2KT1-002	Screw	1	
23	22T3-008	Needle bar	1	
24	2KT1-001	Thread guide	1	
25	22T2-015	Needle	1	
26		Set screw	1	
27	22T2-017	Guide	1	
28	2KT1-003	Slide block	1	DPX17 23#
29	33T1-013	Screw	1	
30	22T2-019	Needle bar clamp assy.	1	
31	33T1-015H	Needle bar clamp	1	
31-1	22T8-001A8	Set screw	2	
31-2	22T8-001A9	Screw	1	
32	2KT4-013	Wire holder, U	1	
33	2KT4-010	Wire holder, D	1	
34	2KT4-012	Washer	1	
35	33T1-005	Felt	1	
36	22T1-010	Screw	1	
37	2KT4-011	Spring	1	
38	2KT4-006	Tension release plate	1	
39	2KT4-004	Tension release pin	1	
40	2KT4-005	Retaining ring	2	
41		Screw	1	
42	2KT4-009	Speed command plate	1	
43	2KT7-006	Plate, needle upper stop	1	
44	2KT7-007	Washer	1	
45	2KT7-009	Screw	1	GB896 2
46	2KT7-008	Synchronizer	1	
47	2KT7-001	Packing, synchronizer	1	
48	2KT7-002	Support, synchronizer	1	
49	2KT7-003	Screw	2	
50	22T6-008D ₃	Washer	2	
51	S02745021	Screw	2	
52	21WF1-062	Cord holder	1	
53	2KT5-040	Screw	1	
54	2KT6-017	Support packing, synchronizer	1	
55	2KT7-004	Ground wire assy.	2	
56	2KT8-001	Screw	2	
57	2KT5-005		1	


3. Presser foot mechanism

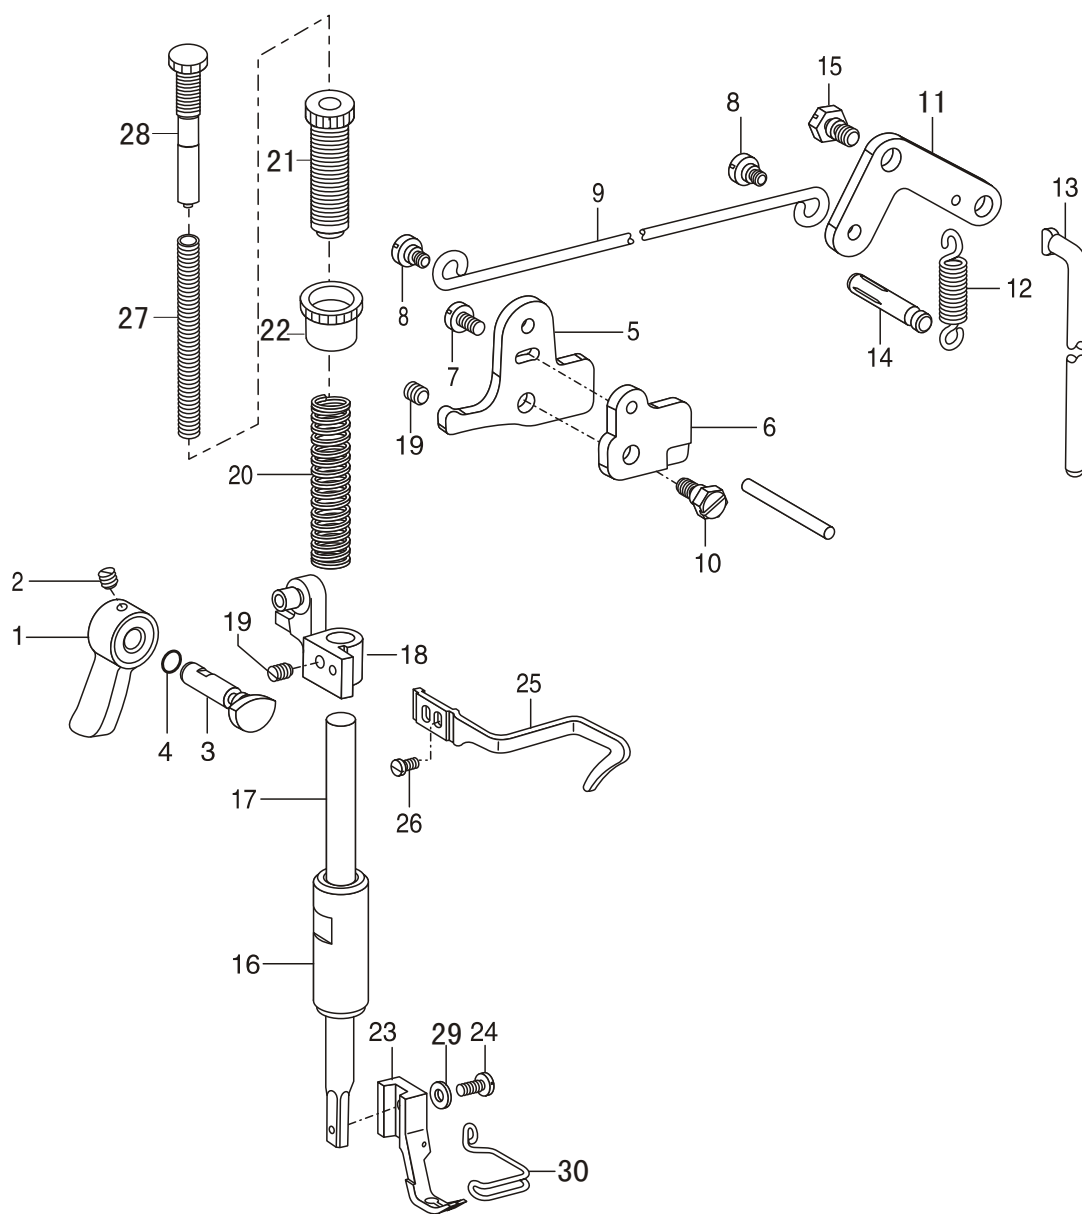

3. Presser foot mechanism

No.	Part Number	Name	Qt.	Remark
1	33T3-003	Presser bar lifter	1	GB3452.1 4.5×1.8G
2	22T1-011	Screw	1	
3	4WF3-002	Lifter crank	1	
4		O ring	1	
5	22T7-004B _{1a}	Lifter lever	1	
6	2KT4-001	Guide plate	1	
7	22T7-004B _{1c}	Screw	1	
8	22T7-004B ₂	Collecting rod	2	
9	1KT4-004	Screw	1	
10	22T7-005A	Lever	1	
11	22T7-007 _{c1}	Spring, extension	1	
12	22T7-007 _{c2}	Knee lifter bar	1	
13	4WF3-001	Spring hook	1	
14	22T7-008	Shoulder screw	1	
15	22T7-005B	Bush	1	
16	34T3-305	Presser bar	1	
17	241WF5-001	Guide bracket	1	
18	7WF3-001	Screw	1	
19	61-04-01/B308	Spring, compression	1	
20	20T4-002	Adjusting screw, presser	1	
21	233WF6-002	Adjusting nut, presser	1	
22	233WF6-003	Presser foot, inside	1	
23	7WF3-003	Screw	1	
24	22T7-015	Thread guide	1	
25	7WF3-002	Adjusting spring	1	
26	33T3-006	Adjusting screw	1	
27	233WF6-005	Finger guard	1	
28	233WF6-004	Safety finger	1	
29			1	GB97.1 4
30	7WF3-004		1	


4. Feed mechanism

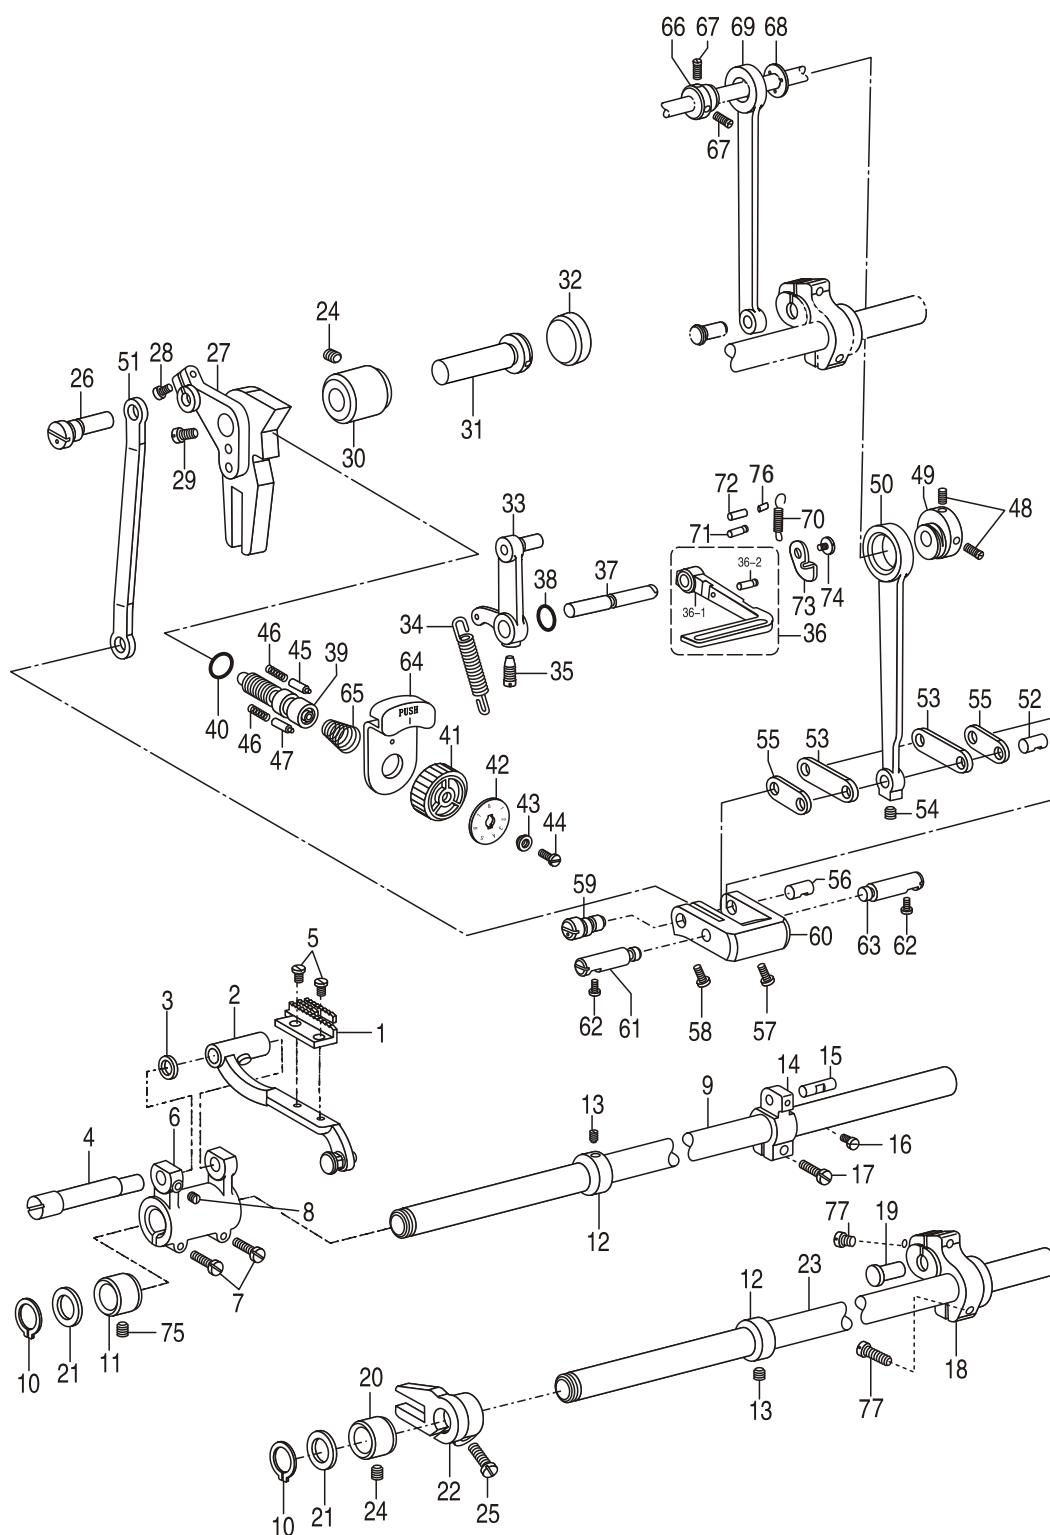

4. Feed mechanism

No.	Part Number	Name	Qt.	Remark
1	2KT3-001	Feed dog	1	
2	36T4-001A1a1	Feed bar	1	
3	51T5-001A6	Washer	1	
4	36T4-001A2	Shaft	1	
5	J0.0.50	Screw	2	
6	4WF2-002	Feed rock arm	1	
7	61-04-01/B504	Screw	2	
8	22T2-019	Feed shaft	1	
9	81WF3-003	Retaining ring	1	
10		Bush, L	2	GB894.1 15
11	22T6-004	Collar	1	
12	22T3-002B1	Set screw	2	
13	22T3-002B2	Feed rocker arm	4	
14	4WF2-006	Stud	1	
15	82T2-003C1a10-2	Set screw	1	
16	36T5-008E5	Screw	1	
17	22T6-008D3	Feed lifting arm	1	
18	68WF3-011	Pin	1	
19	22T6-007	Bush, L	1	
20	22T6-012	Washer	1	
21	51T5-013	Feed lifting arm	1	
22	36T4-018H1D1	Shaft	2	
23	81WF3-007	Screw	1	
24	J0.0.5	Screw	2	
25	22T6-008D3	Connecting stud	2	
26	4WF2-012	Feed regulator	1	
27	7WF2-012	Screw, L	1	
28	20T2-031	Screw, S	1	
29	22T5-010D4	Bush	1	
30	5WF1-003	Shaft	1	
31	22T5-004	Rubber cap	1	
32	2KT2-012	Pin assy. Lever	1	
33	7WF2-009	Spring, extension	1	
34	1KT3-002	Screw	1	
35	22T5-013	Reverse stitching lever assy.	1	
36	2KT3-003	Reverse stitching lever	1	
36-1	2KT3-003a	Spring hook pin	1	
36-2	2KT3-003b	Shaft	1	
37	2KT3-002	O ring	1	
38		Adjusting screw	1	
39	36T5-007D1	O ring	1	
40	33T2-030-A	Stitch length dial	1	6.3×1.8G GB3452.1-92
41	36T5-007D2	Stitch length plate	1	
42	4WF2-004A	Support bush	1	
43	36T5-007D4	Screw	1	
44	36T5-007D5	Positioning pin	1	14×2.4
45	36T5-012		1	


4. Feed mechanism

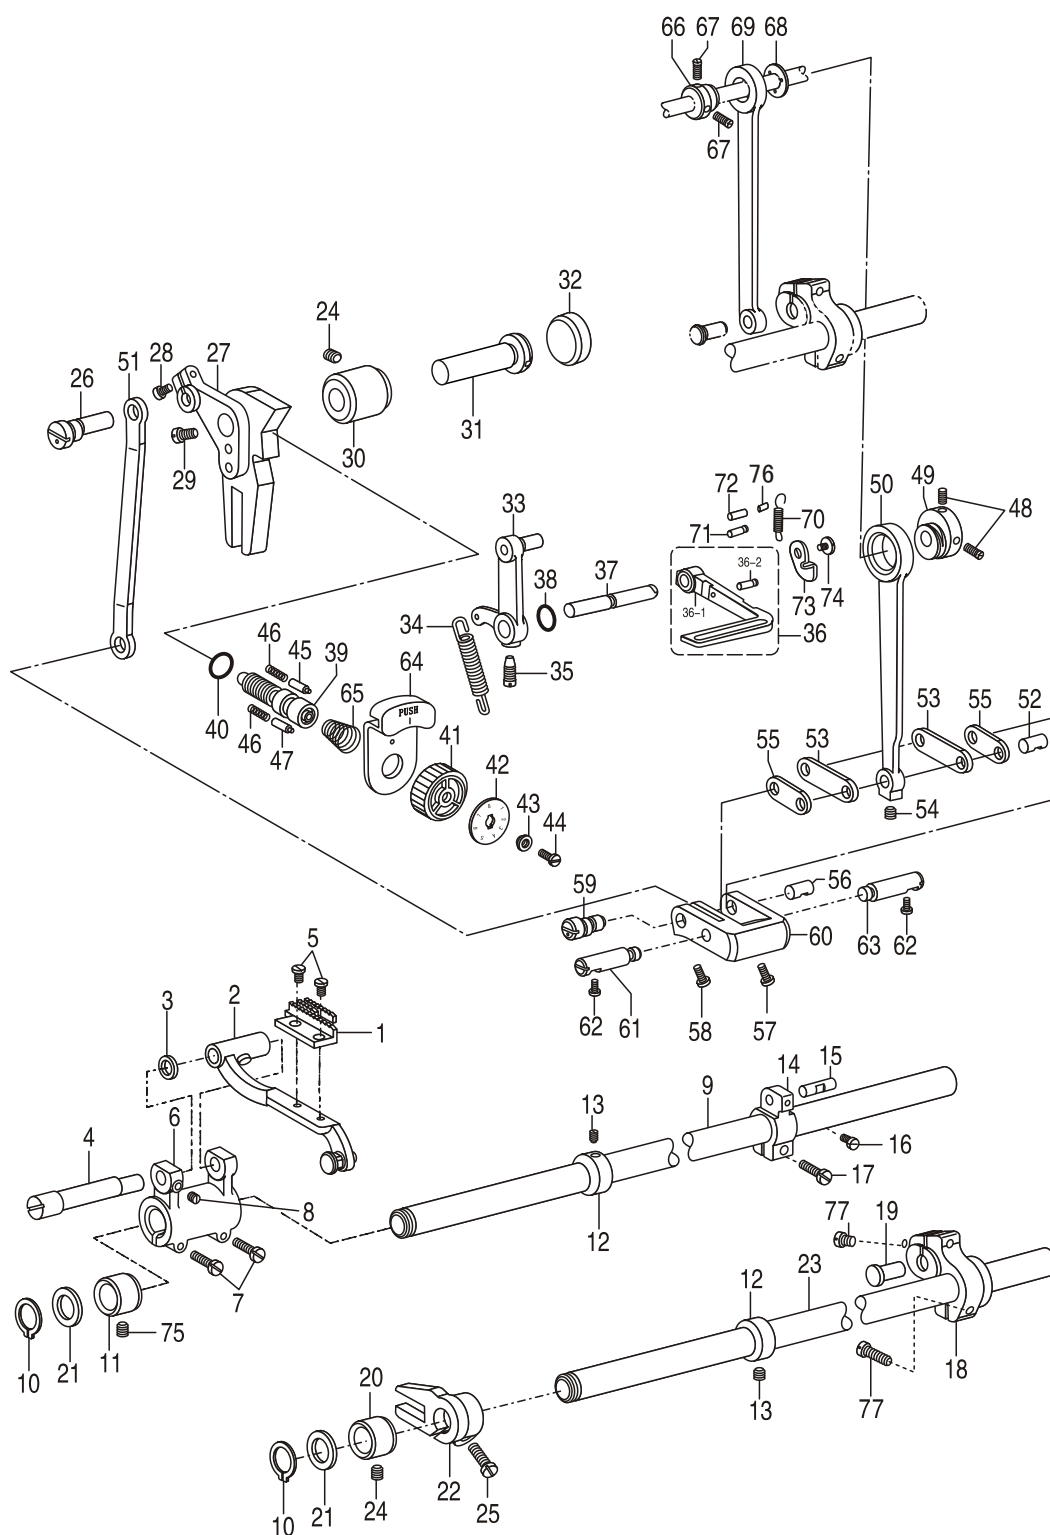

4. Feed mechanism

No.	Part Number	Name	Qt.	Remark
46	22T5-009	Spring	2	
47	7WF2-006	Stopper pin	1	
48	36T3-003D ₂	Set screw	3	
49	36T5-008E ₁	Feed cam	1	
50	4WF2-009A	Feed connecting rod	1	
51	4WF2-009B	Connecting rod	1	
52	82T2-003C1a10-1	Stud	1	
53	36T5-008E4H02	Link	2	
54	36T5-008E5	Set screw	1	
55	36T5-008E4H01	Link	2	
56	36T5-008E6	Shaft	1	
57	36T5-008E7	Screw	1	
58	36T5-008E8	Screw	1	
59	36T5-008E9	Shaft	1	
60	36T5-008E10	Feed regulator crank	1	
61	5WF1-002	Pin shaft, L	1	
62	22T6-008D3	Screw	1	
63	5WF1-001	Pin shaft, R	2	
64	7WF2-005	Stopper	1	
65	36T5-011	Spring	1	
66	36T3-003D ₁	Eccentric wheel	1	
67	36T3-003D ₂	Screw	1	
68	36T3-004	Holder	1	
69	22T3-009D1C	Feed lifting rod	3	
70	2KT3-008	Spring	1	
71	2KT3-009	Spring hook	1	
72	2KT3-006	Pin	1	
73	2KT3-004	Plate	1	
74	2KT3-005	Screw	1	
75	J0.0.35	Screw	1	
76	2KT3-007	Pin shaft	1	
77	17WF4-021	Screw	1	


5. Upper feed mechanism

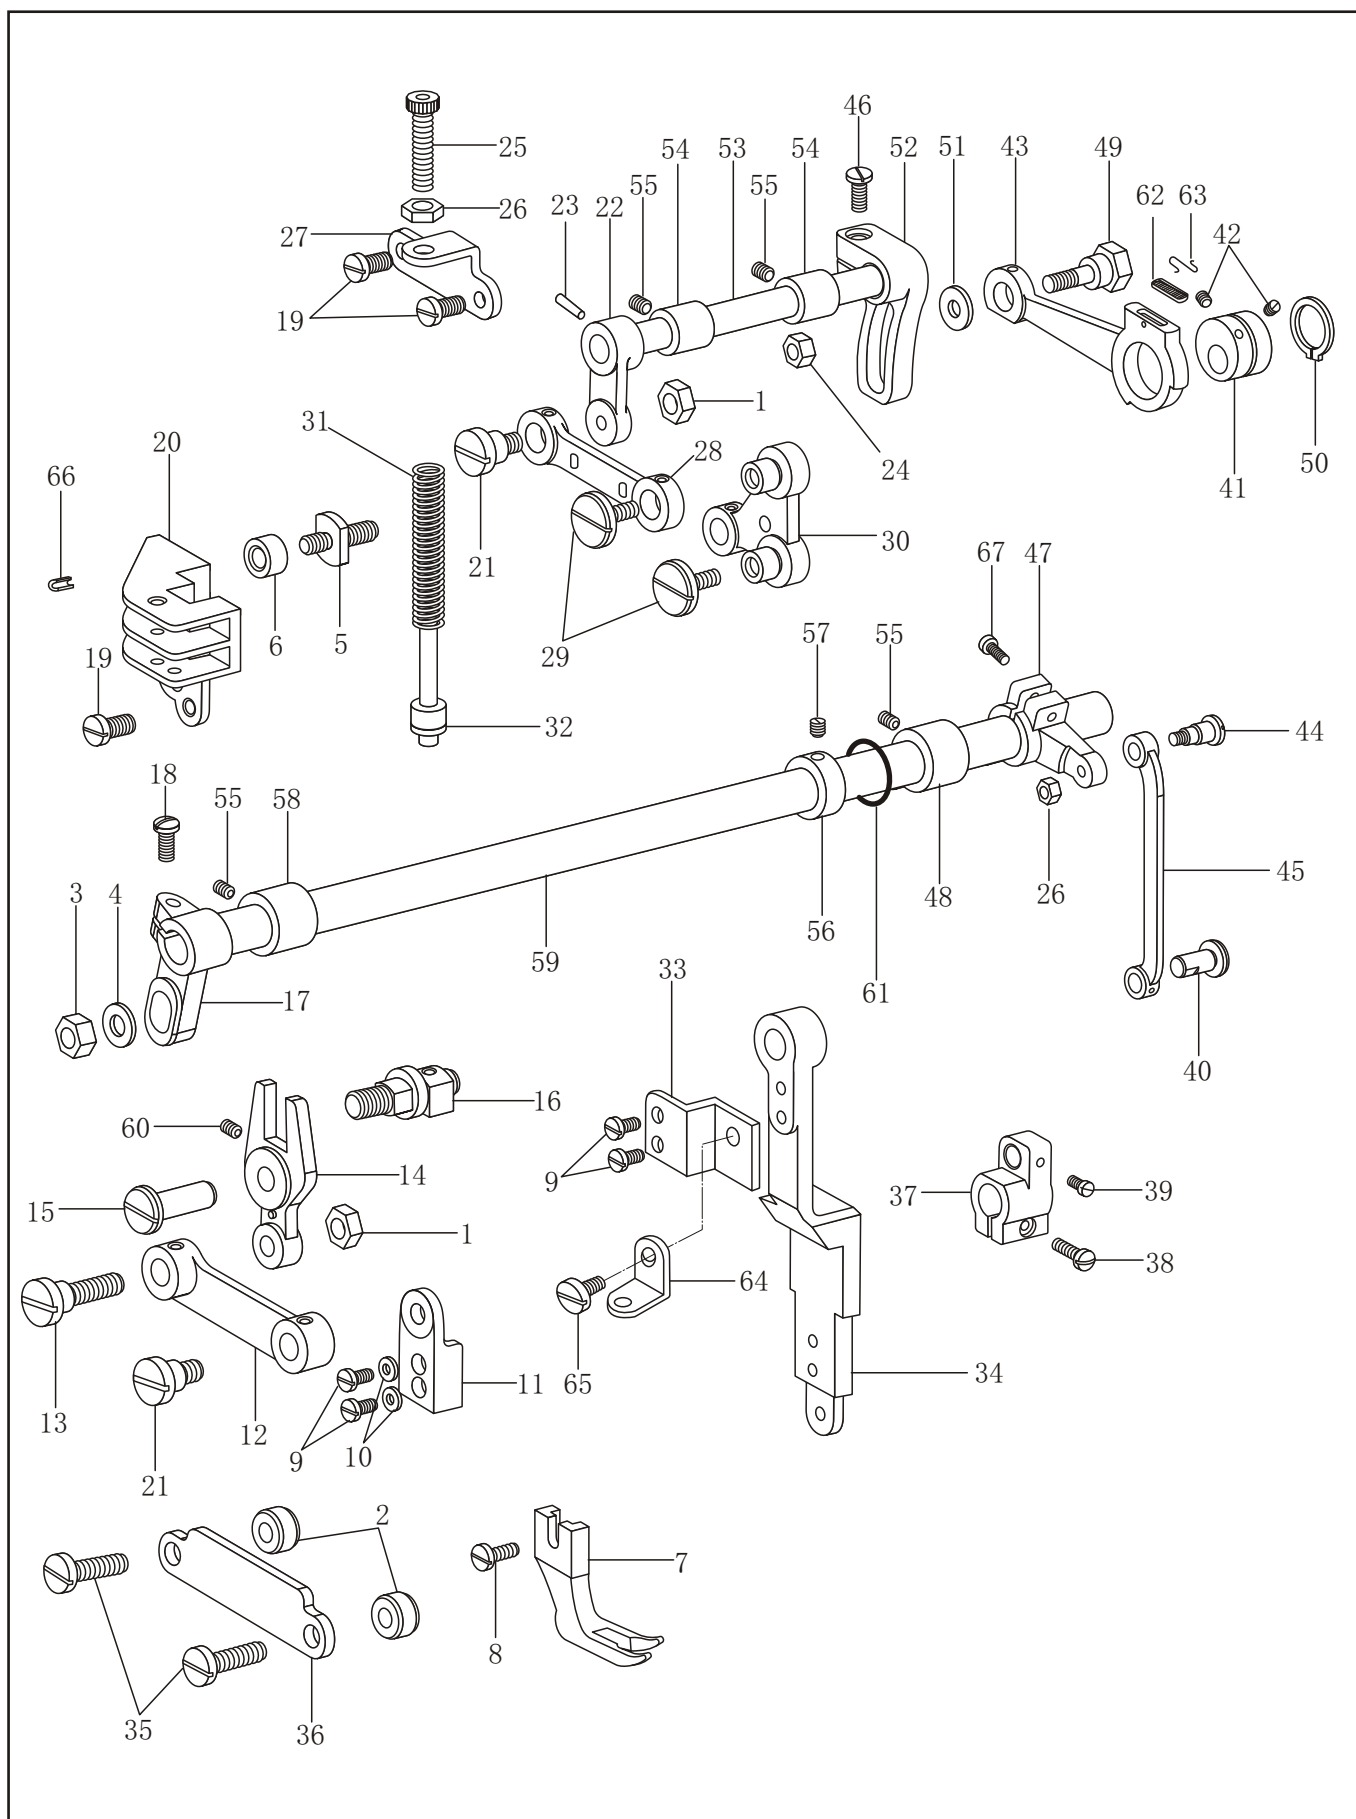

5. Upper feed mechanism

No.	Part Number	Name	Qt.	Remark
1	7WF5-001	Nut	2	GB/T95 6
2	7WF5-002	Collar	2	
3	7WF5-003	Nut	1	
4		Washer	1	
5	7WF5-004	Roller shaft	1	
6	7WF5-005	Roller	1	
7	7WF5-006	Walking foot	—	
	11WF5-001	Screw	1	GB93 4
8	61-04-01/B316	Screw	1	
9	7WF5-008	Washer	1	
10		Clamper	4	
11		Link	2	
12	7WF5-009	Shoulder screw	1	
13	7WF5-010	Lever	1	GB/T117 4×20
14	7WF5-011	Shaft	1	
15	7WF5-012	Roller shaft assy.	1	
16	7WF5-013	Crank	1	
17	7WF5-014A	Screw	1	
18	233WF5-023	Screw	1	
19	1WF4-032	Lever guide	2	GB894.1 25
20	22T2-019	Screw	2	
21	7WF5-018	Feed lifting arm crank, L	4	
22	7WF5-019	Pin	1	
23	7WF5-020	Nut	2	
24		Screw	1	
25	7WF5-050	Nut	1	GB894.1 25
26	7WF5-021	Bracket	1	
27	7WF5-022	Link	1	
28	7WF5-023	Screw	1	
29	7WF5-024	Feed lever	2	
30	7WF5-025	Spring, compression	1	
31	7WF5-026	Guide shaft	1	GB894.1 25
32	81WF6-003	Holder plate	2	
33	81WF6-004	Connecting rod	1	
34	241WF3-001	Screw	1	
35	7WF5-030	Rod guide	1	
36	22T6-008D ₃	Feed rocker arm	1	
37	7WF5-031	Screw	1	GB894.1 25
38	5WF4-002	Set screw	2	
39	61-04-01/B504	Stud	1	
40	36T5-008E ₅	Eccentric wheel	1	
41	5WF4-001	Screw	1	
42	7WF5-032	Connecting rod	1	
43	22T2-005B ₃	Shoulder screw	1	GB894.1 25
44	7WF5-034	Feed lifting arm crank, R	2	
45	7WF5-037	Bush, M	1	
46	7WF5-038	Screw	1	
47	7WF5-039	Retaining ring, C	1	
48	241WF3-003	Washer	1	
49	241WF3-005	Feed arm	1	GB894.1 25
50	7WF5-042	Feed lifting shaft	1	
51		Bush	1	
52	7WF5-049	Screw	1	
53	7WF5-043	Collar	1	
54	7WF5-044	Bush, L	1	GB894.1 25
55	7WF5-045	Upper feed shaft	1	
56	61-04-01/B308	Screw	2	
57	22T3-002B ₁	0 ring	3	
58	22T3-002B ₂	Oil felt	1	
59	1KT2-004	Spring	1	GB/T879.1 3×8
60	241WF3-004	Bracket	2	
61	7WF5-048	Screw	1	
62	33T2-030-A	Pin	1	
63	7WF5-035	Screw	1	
64	1WF5-024	Screw	1	
65	241WF3-002	Pin	1	GB/T879.1 3×8
66	241WF3-006	Screw	1	
67	1WF5-024	Screw	2	
	16WF3-031	Screw	1	

6. Hook mechanism

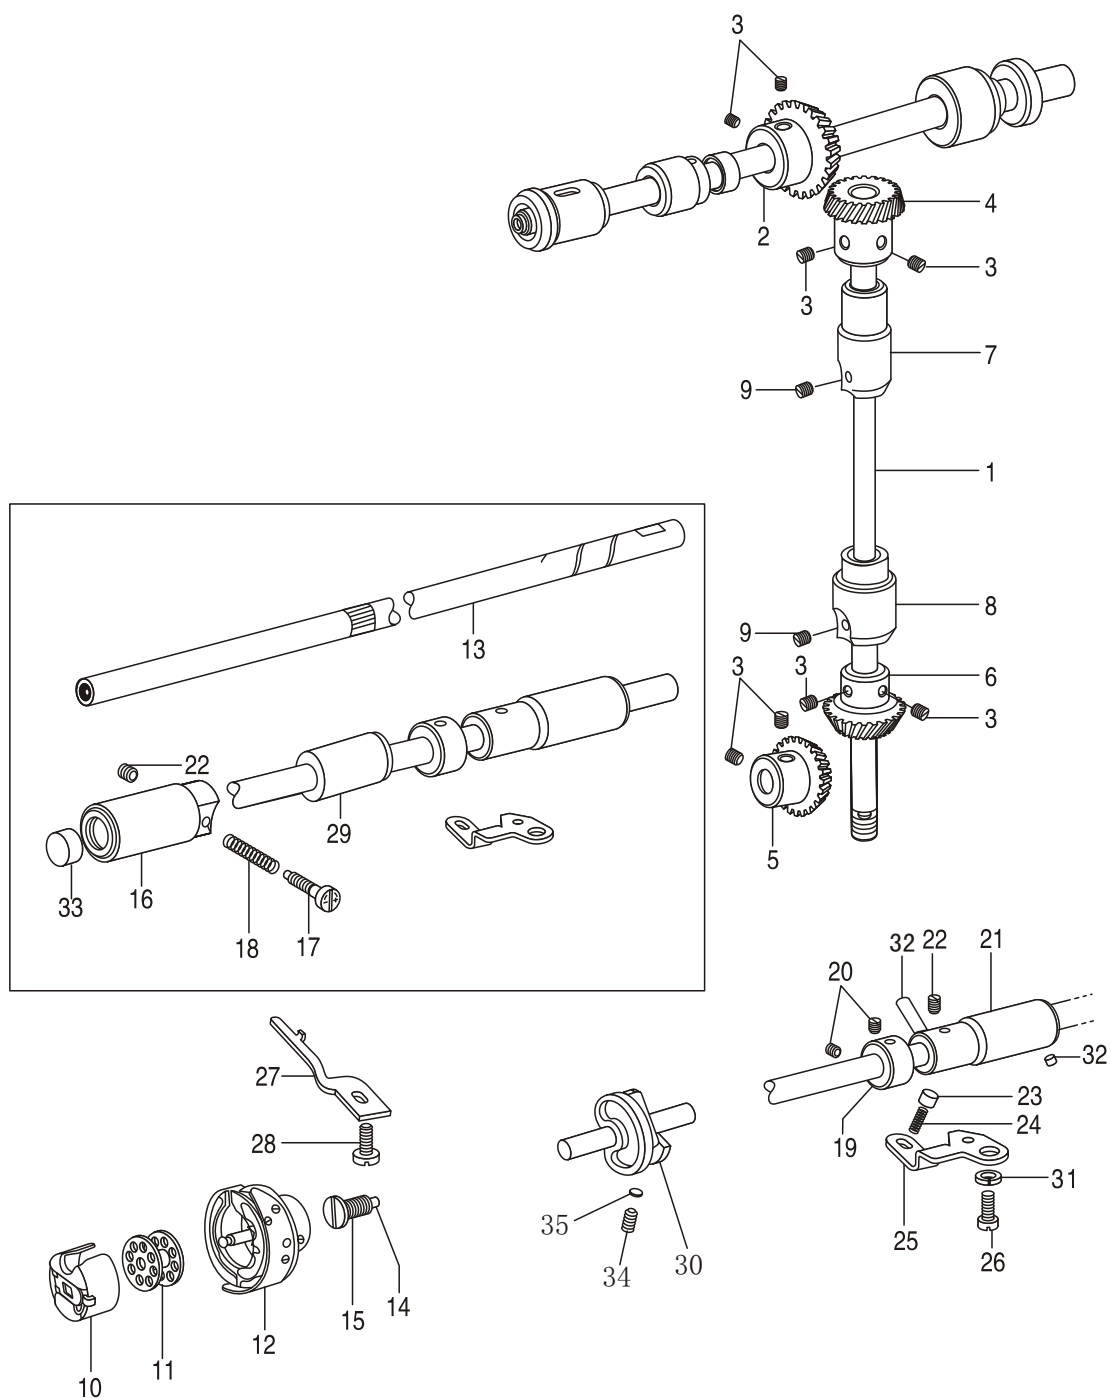


6. Hook mechanism

No.	Part Number	Name	Qt.	Remark
1	15WF1-001	Vertical shaft	1	
2	ZOA140379	Bevel gear, upper shaft	1	
3	22T2-005B3	Set screw	8	
4	ZOA140380	Bevel gear, vertical shaft, U	1	
5	ZOA140383	Bevel gear, lower shaft	1	
6	ZOA140382	Bevel gear, vertical shaft, L	1	
7	2KT1-015	Bush, vertical shaft, U	1	
8	2KT1-008	Bush, vertical shaft, L	1	
9	J0.0.40	Screw	1	
9	151845001	Bobbin case	2	
10	24WF2-001	Bobbin	1	
11	159793901	Hook assy.	1	
12	122WF3-001	Lower shaft	1	
13	22T4-001A1a2	Filter	1	
14	22T4-001A1a1	Screw	1	
15	68WF3-015	Bush, lower shaft, L	1	
16	22T4-005	Adjusting screw, oil	1	
17	22T4-006	Adjusting spring	1	
18	22T4-002B1	Collar	1	
19	J0.0.35	Screw	1	
20	68WF3-002	Bush, lower shaft, R	1	
21	J0.0.5	Screw	2	
22	36T4-015	Plunger	1	
23	36T4-016	Spring	2	
24	22T4-010	Holder plate	1	
25	22T9-006	Screw	1	
26	2KT1-013	B/case holder position bracket	1	
27	22T4-015	Screw	1	
28	68WF3-016	Bush, lower shaft, M	1	
29	233WF4-010	Trimming cam	1	
30		Washer	1	
31	22T4-007C2	Oil tube	1	
32	68WF3-014	Oil seal	1	
33	2KT5-031	Screw	1	
34	2KT5-032	Washer	1	
35			2	

GB93 6


7. Lubrication mechanism

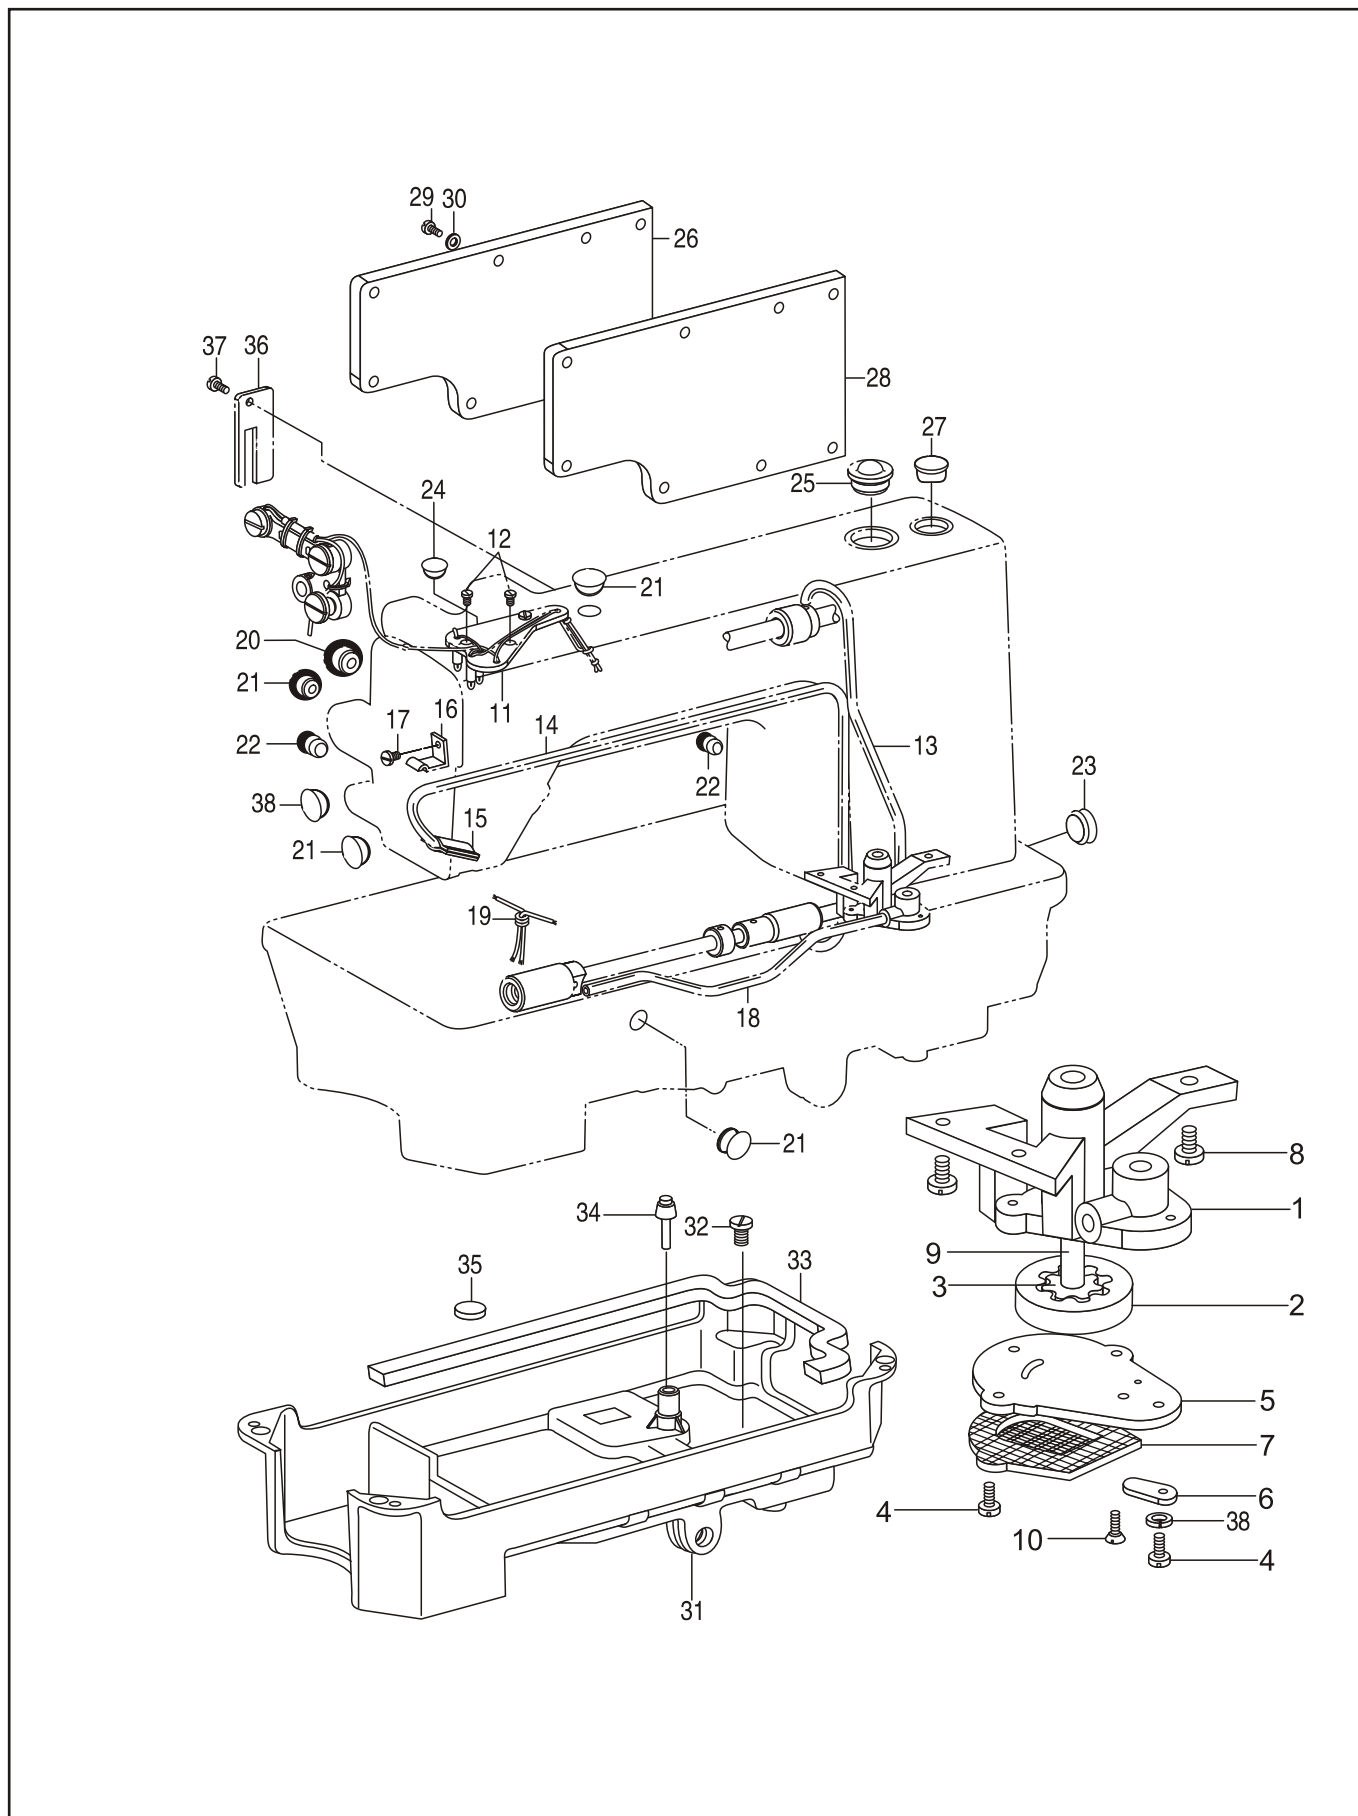

7. Lubrication mechanism

No.	Part Number	Name	Qt.	Remark
1	15WF4-003	Pump body	1	GB/T67 M3×10
2	15WF4-006	Big gear, pump	1	
3	15WF4-007	Small gear, pump	1	
4		Screw	3	
5	15WF4-004	Cover	1	
6	22T8-007	Throat plate	1	GB/T68 M3×10
7	22T8-008A	Filter set	1	
8	22T8-009	Screw	1	
9	22T8-009	Shaft	3	
10	15WF4-005	Screw	1	
11		Setting plate	2	
12	7WF4-016	Screw	1	
13	22T8-012	Oil tube, U	2	
14	22T8-013D	Tube assy.	1	
15	22T8-014	Felt	1	
16	22T8-015	Tube carrier	1	
17	22T8-016	Screw	1	
18	22T8-016	Oil tube, L	1	
19	20T4-006	Oil wick	1	
20	122WF5-001	Rubber cap	1	
21		Rubber cap	1	
22	22T1-003C3	Rubber cap	1	
23	22T1-003C4	Rubber cap	4	
24	22T1-015	Rubber cap	2	
25	22T1-016	Oil gauge window	1	
26	22T1-017	Back cover	1	
27	22T1-017	Rubber cap	1	
28	22T1-008	Packing	1	
29	241WF1-005	Screw	1	
30	13WF2-035	Washer	1	
31	241WF1-006	Oil pan	1	
32	22T1-006	Screw	8	
33	22T1-007	Packing, oil pan	8	
34	122WF7-005	Lifter bar, knee	1	
35	22T9-001A2	Magnet	1	
36	2KT9-008	Cover, S	1	
37	4WF5-002	Screw	1	
38	22T9-012	Washer, spring	1	
	7WF4-011		1	GB93 4
	33T3-006		1	
38			1	

8. Thread trimming mechanism

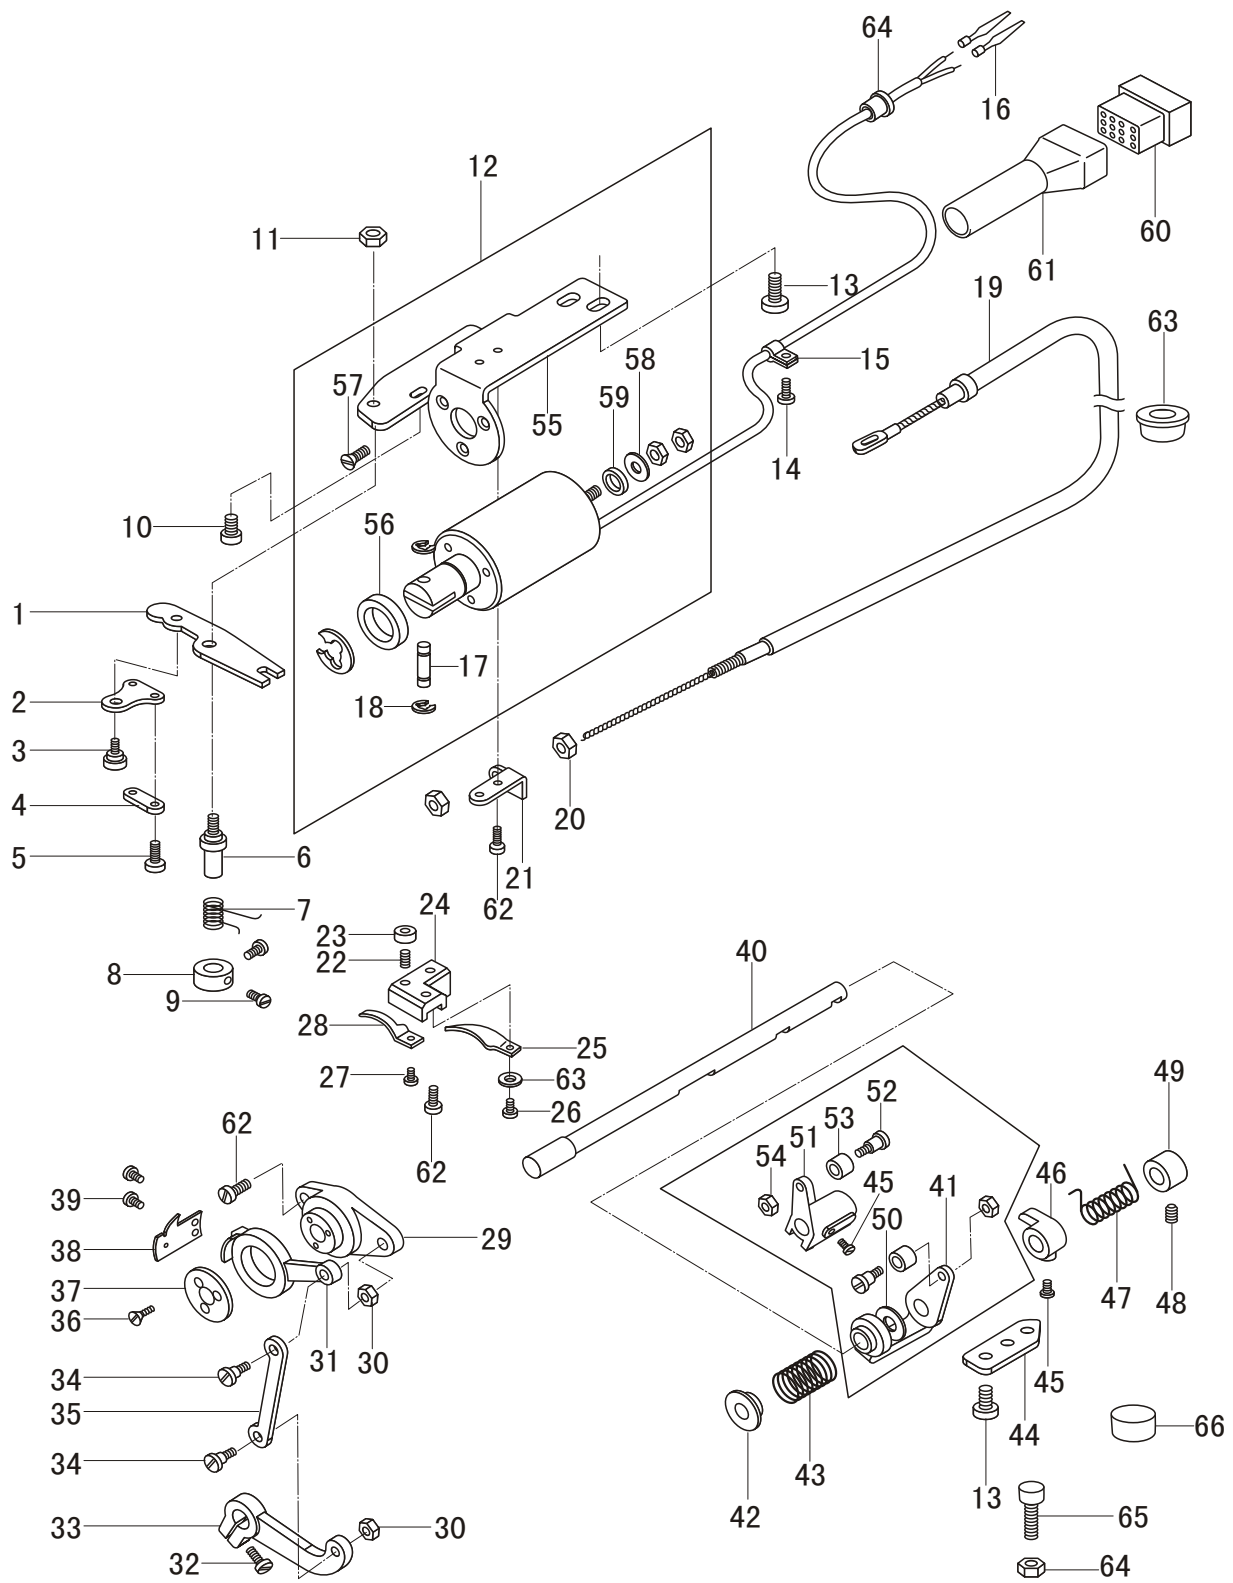


8. Thread trimming mechanism

No.	Part Number	Name	Qt.	Remark
1	78WF1-004	Driven plate	1	
2	78WF1-005	Wire support	1	
3	78WF1-006	Screw	1	
4	78WF1-007	Link	1	
5	37T2-203	Screw	1	
6	78WF1-008	Screw pin, driven plate	1	
7	78WF1-009	Spring	1	
8	78WF1-010	Collar	1	
9	1WF1-024	Screw	2	SM11/64"×40×5
10	22T4-015	Nut	1	SM1/8"×44×7
11	36WF5-008	Thread trimmer solenoid assy.	1	
12	78WF1-001	Screw	1	
13	36WF1-056	Screw	4	
14	21WF4-047	Wire holder	1	SM9/64"×40×6.5
15	84WF1-022	Terminal pin	1	SM11/64"×40×10
16	2KT6-001C	Pin	2	
17	78WF1-001A	Retaining ring	1	
18		Tension release wire	1	
19		Nut	2	SM15/64"×28×12
20	241WF6-001	Tension release lever	1	SM9/64"×40×6
21	2KT4-020	Screw	2	
22	78WF1-012	Nut	1	
23	78WF1-013	Holder, F-knife	1	
24	78WF1-014	Lower thread finger	1	GB896 4
25	78WF1-015	Screw	1	
26	78WF1-016	Screw	1	
27	78WF1-017	Fixed knife	1	
28	2KT6-017	Holder, M-knife	1	
29	2KT5-002	Nut	1	SM9/64"×40×8.5
30	78WF1-002	Holder, M-knife, L	1	
31	78WF1-017	Screw	1	
32	2KT5-013	Driven crank	2	
33	78WF1-018	Screw	1	SM9/64"×40×6
34	22T6-008D3	Link	1	SM9/64"×40×4.3
35	78WF1-019	Screw	1	
36	78WF1-020A	Washer	1	
37	78WF1-020	Movable knife	2	
38	78WF1-021	Screw	1	
39	78WF1-022	Thread trimmer cam lever shaft	3	
40	78WF1-022	Thread trimmer cam lever, R	1	SM11/64"×40×12
41	78WF1-003	Collar	1	
42	2KT5-007	Spring	2	SM11/64"×40
43	78WF1-023	Stopper plate	1	
44	78WF1-024B	Screw	1	SM1/8"×44×5.2
45	78WF1-025	Positioning block	1	
46	78WF1-026	Spring	1	
47	241WF6-002	Screw	1	SM11/64"×40
48	21WF3-010	Collar	1	
49	78WF1-028	Plastic ring	3	
50	78WF1-029	Thread trimmer cam lever, L	1	
51	22T3-002B2	Screw	1	
52	78WF1-030	Roller	2	
53	78WF1-024F	Nut	1	
54	78WF1-024A	Thread trimmer solenoid base	1	SM15/64"×28×6
55	78WF1-024C	Seal washer, big	1	
56	78WF1-024D	Screw	1	
57	78WF1-024E	Washer	2	SM1/4"×40×4
58	78WF1-001B	Seal washer, small	2	
59	78WF1-001C	Connector	2	
60		Cover	1	
61		Screw	1	
62		Guard	1	
63		Nut	3	SM3/16"×28×8.5
64		Screw	1	
65	78WF1-001D	Packing	1	SM3/16"×28
66	2KT8-002		1	
	2KT8-003		1	
	21WF4-047		4	GB/T819.2 M4×6
	2KT5-041		1	GB/T96.1 5
			1	
	241WF6-003		1	
	241WF6-004		1	

SM11/64"×40×7.5


9. Reverse stitching mechanism

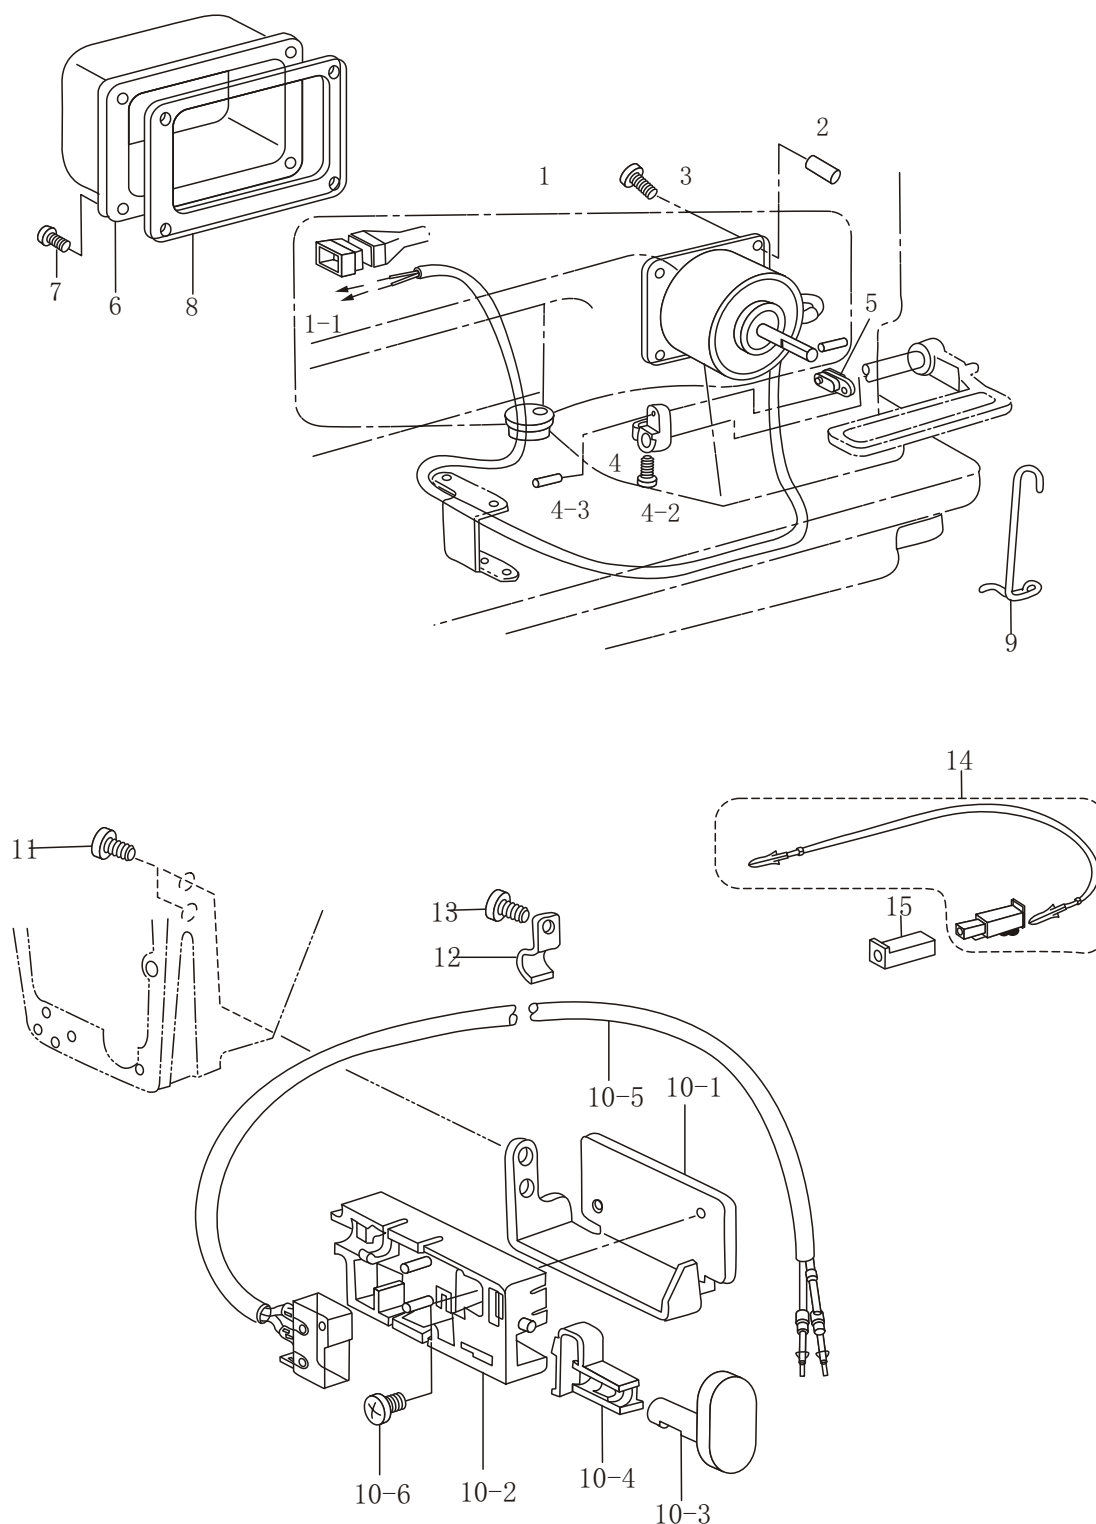

9. Reverse stitching mechanism

No.	Part Number	Name	Qt.	Remark
1	2KT6-001	Quick reverse solenoid assy.	1	
1-1	2KT6-001C	Terminal pin	2	
2	2KT6-006	Space collar	4	
3	2KT6-007	Screw	4	
4-1	2KT6-004	Solenoid lever	1	
4-2		Screw	1	
4-3	2KT5-015	Pin	1	
5	2KT6-003	Connecting lever	1	
6	2KT6-002	Solenoid cover	1	
7	2KT6-008	Screw	1	
8	22T1-006	Washer	4	
9	2KT6-009	Cord holder	1	
	2KT3-011	Support	1	
10-1	2KT6-011	Base	1	
10-2	2KT6-013	Actuator	1	
10-3	2KT6-015	Spring, R-switch	1	
10-4	2KT6-014	Reverse switch assy.	1	
10-5		Screw	1	
10-66	2KT6-016	Screw	1	
11		Cord holder	1	GB/T818 M3×6
12	2KT6-012	Screw	2	
13	2KT5-040	Wire, reverse solenoid	3	
14	2KT6-017	Connector	3	
15	2KT6-018		1	
	2KT6-019		1	

10. Accessories

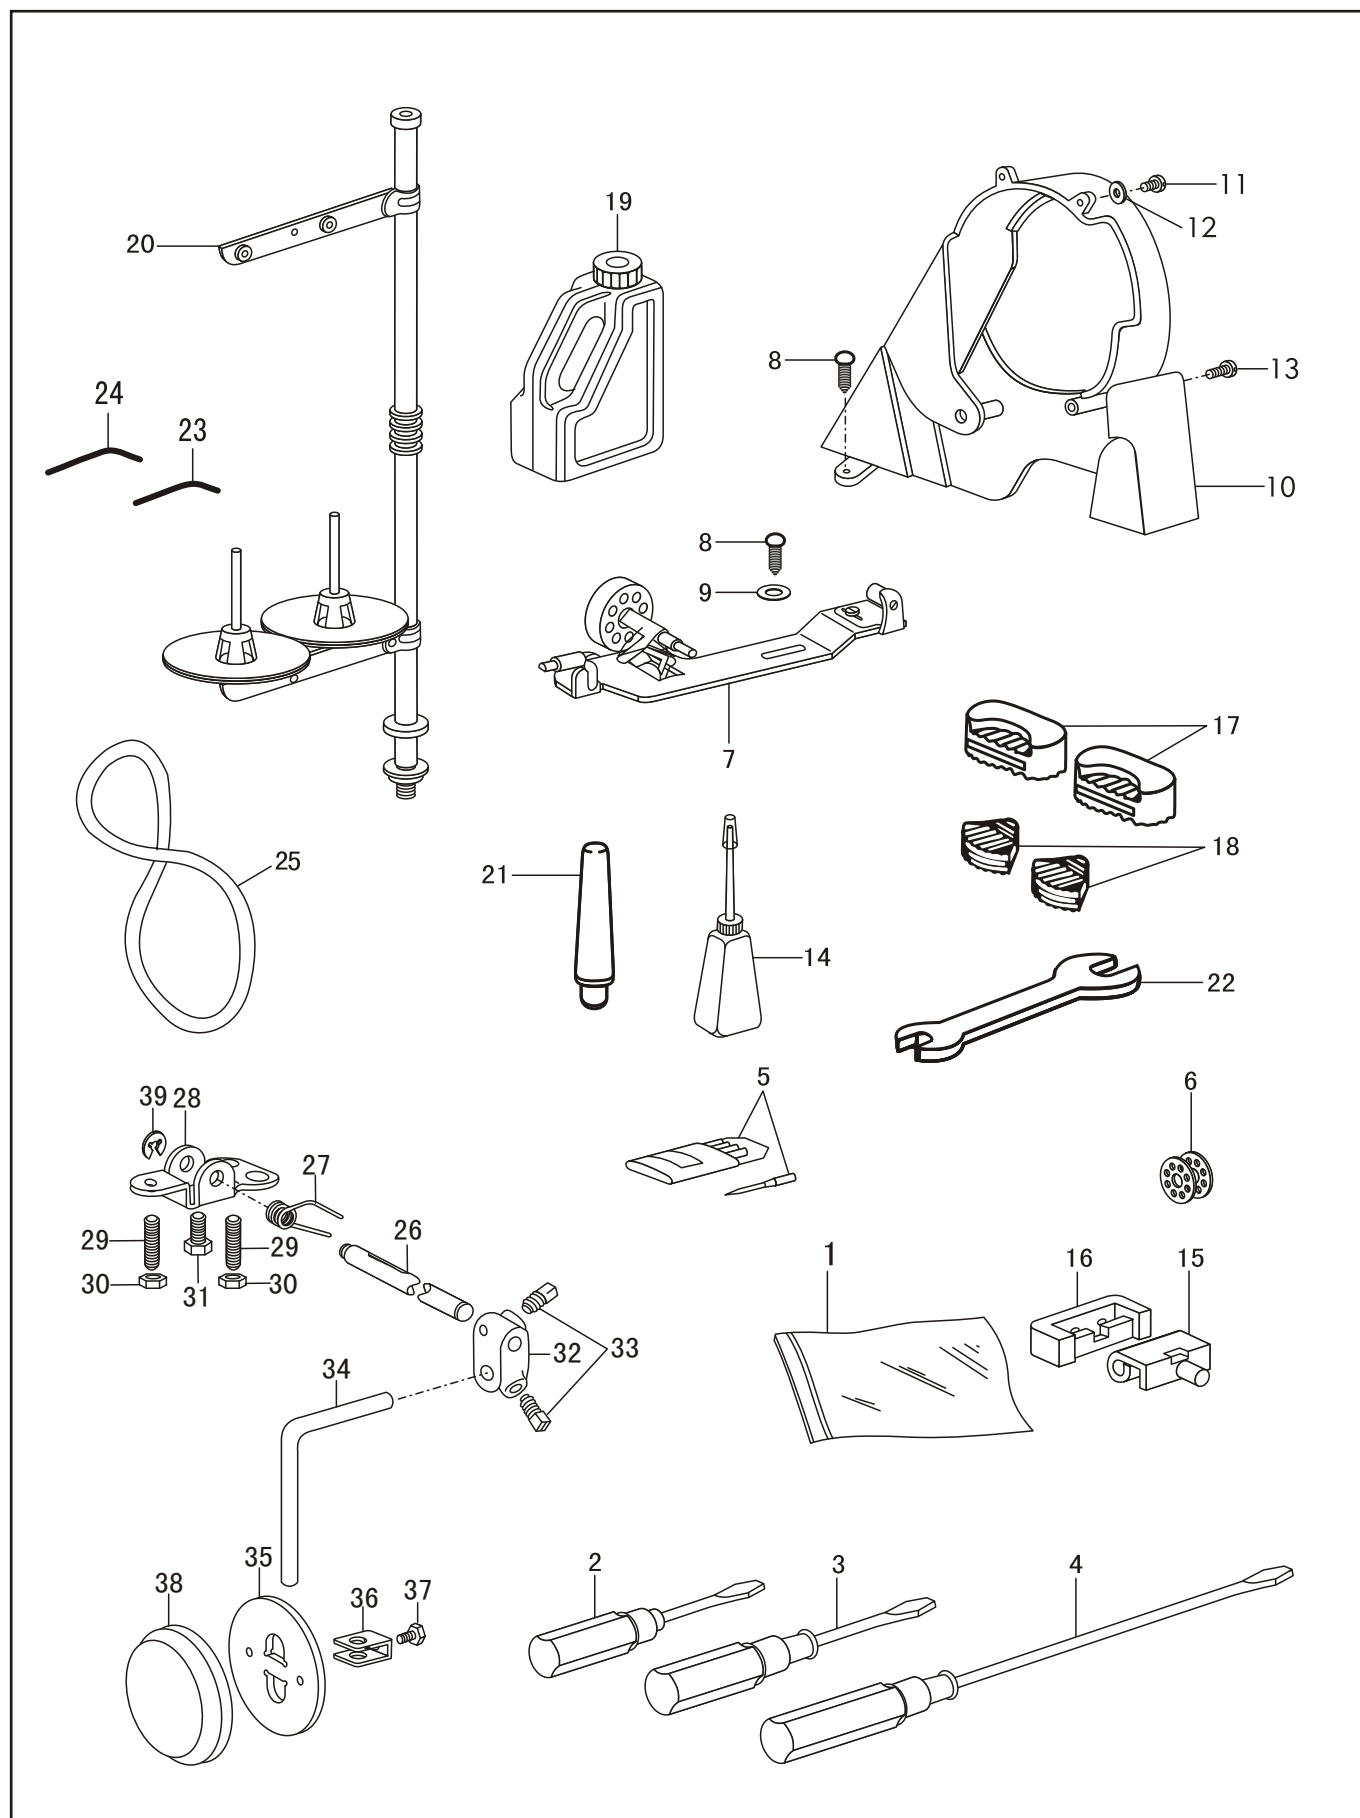

10. Accessories

No.	Part Number	Name	Qt.	Remark
1	33TF-010	Accessory bag	1	
2	33TF-014	Screw driver, S	1	
3	33TF-013	Screw driver, M	1	
4	33TF-012	Screw driver, L	1	
5		Needle	4	DP×17 23#
6	24WF2-001	Bobbin	3	
7	S14420020	Bobbin thread winder assy.	1	
8		Screw	4	GB5282 ST4.8×19
9		Washer	2	GB/T95 6 Φ14
10	122WF7-004	Belt guard assy.	1	
11		Screw	2	GB/T67 M4×8
12		Washer	2	GB/T97.1 4
13		Screw	2	GB/T67 M5×12
14	33TF-011	Oil pot	2	
15	22T9-007F1	Head hinge	1	
16	22T9-007F2	Cushion, head hinge	2	
17	1KT5-004	Head cushion, L	2	
18	1KT5-003	Head cushion, S	2	
19	1KT5-003	Oil tank	2	
20	1F-012	Thread stand assy.	1	
21	4F-007	Head rest	1	
22	1KT5-007	Wrench	1	
23		Wrench, 2mm	1	
24		Wrench, 3mm	1	2 GB/T5356-1998
25		V-belt	1	3 GB/T5356-1998
26	7F-001	Lifter shaft	1	M41
27	22T9-001A ₆	Spring	1	
28	22T9-001A ₇	Bracket	1	
29	22T9-001A ₈	Adjusting screw	1	
30	22T9-001A ₉	Adjusting nut	1	
31	22T9-001A ₁₀	Screw	2	
32	22T9-036	Bracket	2	
33	22T9-003B ₃	Screw	1	
34	22T9-003B ₂	Lifter bar	1	
35	22T9-003B ₅	Knee lifter plate	1	
36	22T9-003B ₆	Stopper	1	GB/T5781 M8×12 M8×20
37	22T9-003B ₇	Screw	1	
38	22T9-003B ₈	Cover, K-lifter plate	1	
39		Retaining ring	1	
			1	GB896 9